



Bel-Halo DENTAL LIGHT


PARTS LIST

(D240 Series)

TABLE OF CONTENTS


	PAGE
1 . HEAD SECTION -----	4
2 . ARM SECTION (D241, D242) -----	6
3 . ARM SECTION (D245, D247, D248) -----	8
4 . ARM SECTION (D247, D248) -----	10
5 . ARM SECTION (D246G-QU/EV) -----	12
6 . ARM SECTION (D249) -----	14
7 . POWER SUPPLY BOX (D241) -----	16
8 . POWER SUPPLY BOX (D242) -----	18
9 . POWER SUPPLY BOX (D245) -----	20
10 . POWER SUPPLY BOX (D247) -----	22
11 . POWER SUPPLY BOX (D248) -----	24
12 . POWER SUPPLY BOX (D246G-QU) -----	26
13 . SWITCH BOX (D246G-QU)-----	28
14 . TRANSFORMER BOX SECTION (D246G-EV, D249) -----	30
15 . SWITCH BOX (D246G-EV , D249W-X)-----	32
16 . SWITCH BOX (D249W-XN)-----	34
17 . TROLLEY AND RAIL SECTION (D245) -----	36
18 . CEILING POLE SECTION (D242) -----	38
WIRING DIAGRAM	
1 . AL-D241G / AL-D241W -----	40
2 . AL-D242G -----	41
3 . AL-D245G -----	42
4 . AL-D247G -----	43
5 . AL-D248G -----	44
6 . AL-D246G-QU-----	45
7 . AL-D246G-EV / AL-D249W-X*-----	46

HEAD SECTION

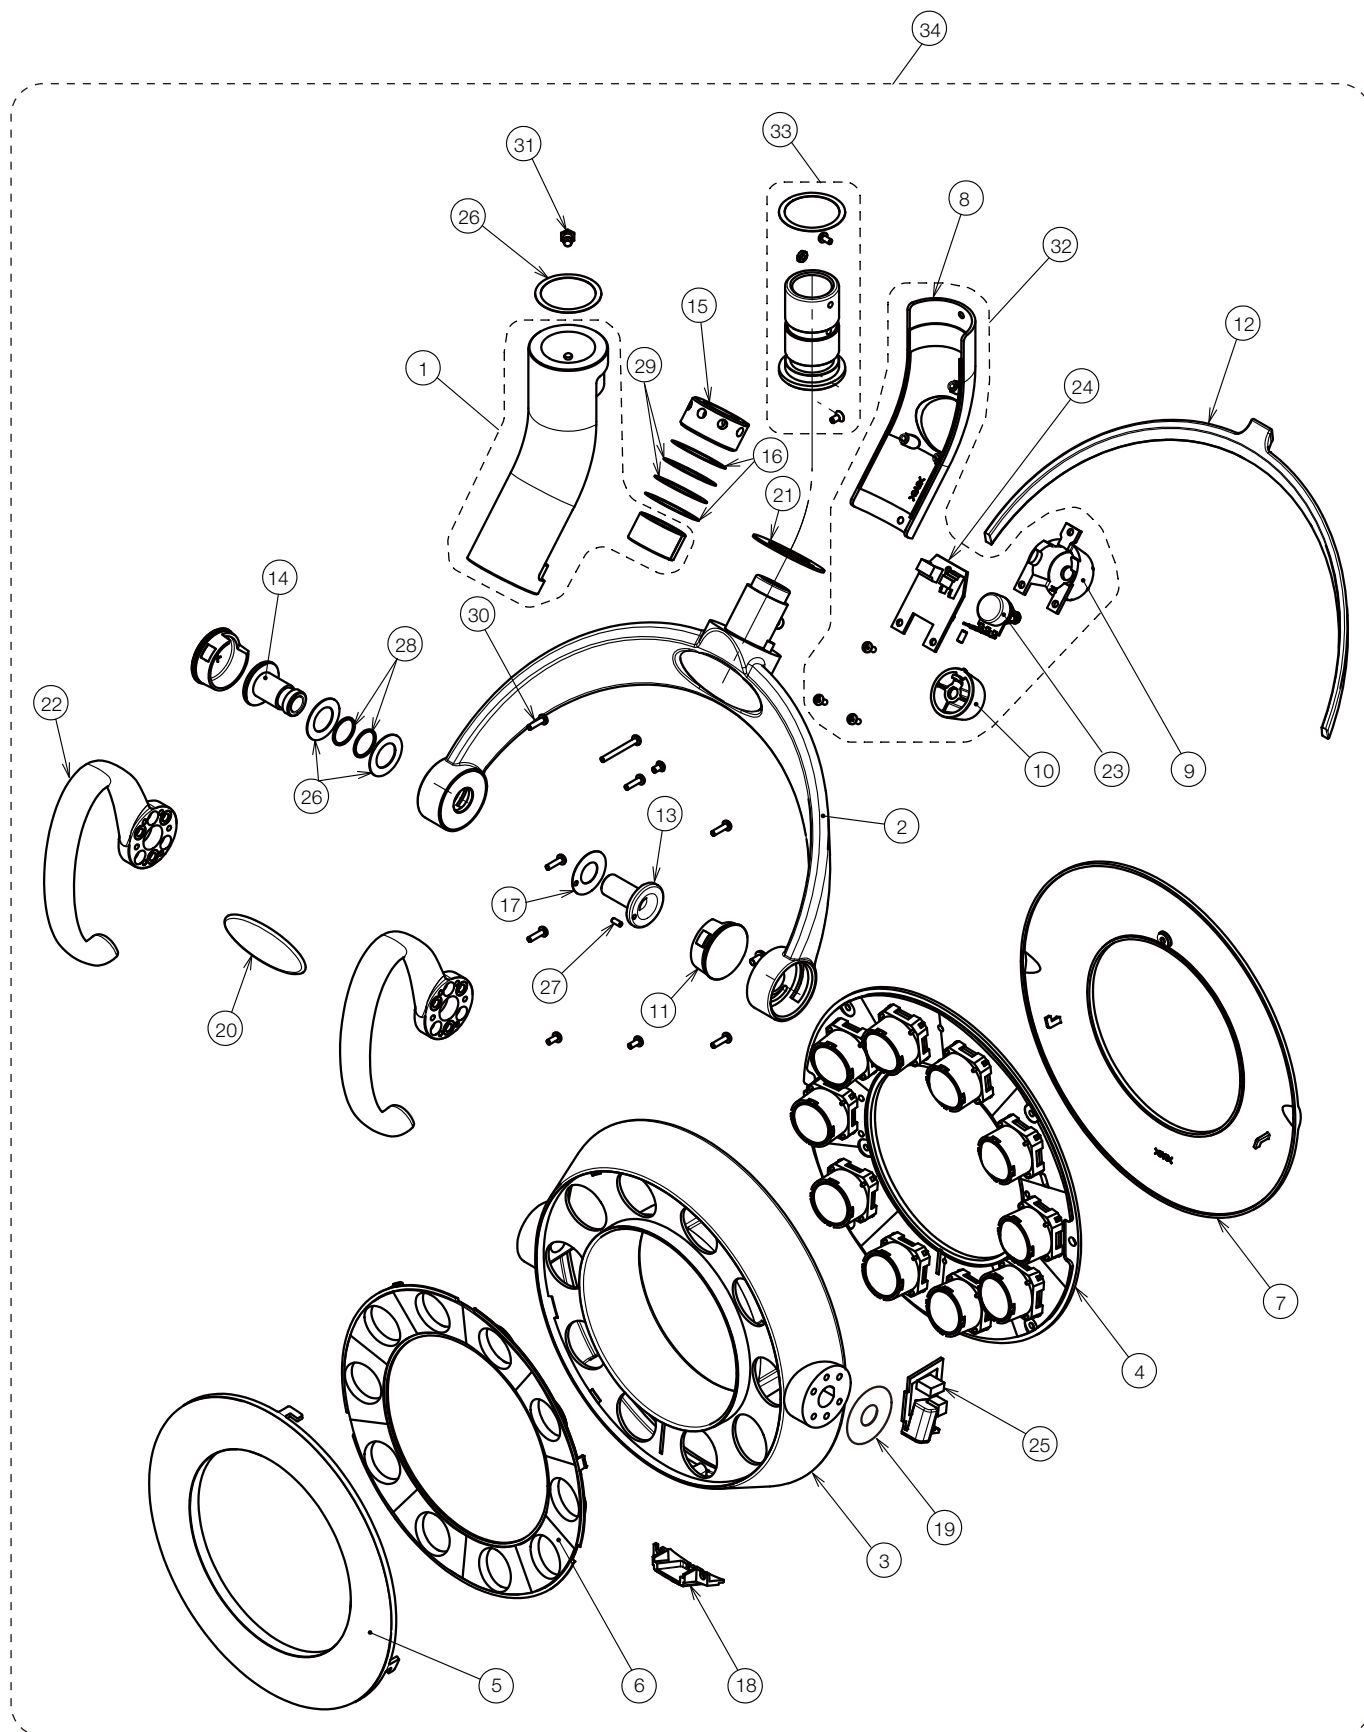


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1P03KQA0	YOKE WITH BUSH (CN-80)	1		
	1P034FA0	YOKE WITH BUSH (RAL9003)			
2	1P03GFA0	SECOND YOKE WITH ROLL PIN (CN-80)	1		
	1P03M3A0	SECOND YOKE WITH ROLL PIN (RAL9003)			
3	1A0WFYA0	OUTER FLAME COVER (CN-80)	1		
	1A0WFXA0	OUTER FLAME (RAL9003)			
4	1G095TA0	LED MODULE	1		
5	1A07JHB0	LENS COVER	1		
6	1A07JJA0	REFLECTOR	1		
7	1A07JKA0	OUTER FLAME COVER (CN-80)	1		
	1A081NA0	OUTER FLAME COVER (RAL9003)			
8	1A07JLA0	YOKE COVER (CN-80)	1		
	1A081MA0	YOKE COVER (RAL9003)			
9	1A07JMA0	LED DISPLAY COVER	1		
10	1A07JNA0	VOLUME GRIP	1		
11	1A07JPA0	YOKE CAP (CN-80)	2		
12	1A07JQA0	YOKE PACKING (CN-80)	1		
13	1A07JRA0	HEAD ROTATION SHAFT (FIXED)	1		
14	1A07JSA0	HEAD ROTATION YOKE SHAFT (ADJUSTMENT)	1		
15	1A07JTA0	NUT FOR PATTERN ROTATION	1		
16	1A07JUA0	SLIDE WASHER FOR YOKE ROTATION	2		
17	1A07JVA0	SLIDE WASHER FOR HEAD ROTATION SHAFT	1		
18	1A07JWA0	SENSOR COVER	1		
19	1A07JYA0	SLIDE WASHER	1		
20	1A0829B0	BELMONT LOGO LABEL	1		
21	1A07K0A0	PLATE FOR PATTERN ROTATION	1		
22	1A07L6B0	HANDLE (CN-80)	2		
23	1E02E3A0	VOLUME PART OF INTENSITY CONTROL	1		
24	1G027ZC0	LED DISPLAY PCB	1		
25	1G027TD0	SENSOR PCB ASSY	1		
26	CAHC89A0	WASHER 24x14.2x0.5	2		
27	CEFN35A0	ROLE PIN WAVEFORM M2.5x6 SUS	1		
28	CEIA10A0	WAVE WASHER	2		
29	CENX96A0	WAVE WASHER	2		
30	ZA111JPY	PAN HEAD SEMS SCREW M3x8 CHROME	7		
31	CAGP69B0	YOKE STOP SCREW	1		
32	1G027VA0	YOKE COVER ASSY (CN-80)	1		
	1G02E1A0	YOKE COVER ASSY (RAL9003)			
33	CGGN66A0	YOKE SHAFT SET	1		
34	1P072GA0	LIGHT HEAD ASSY (CN-80)	1		
	1P072FA0	LIGHT HEAD ASSY (RAL9003)			

ARM SECTION (D241, D242)

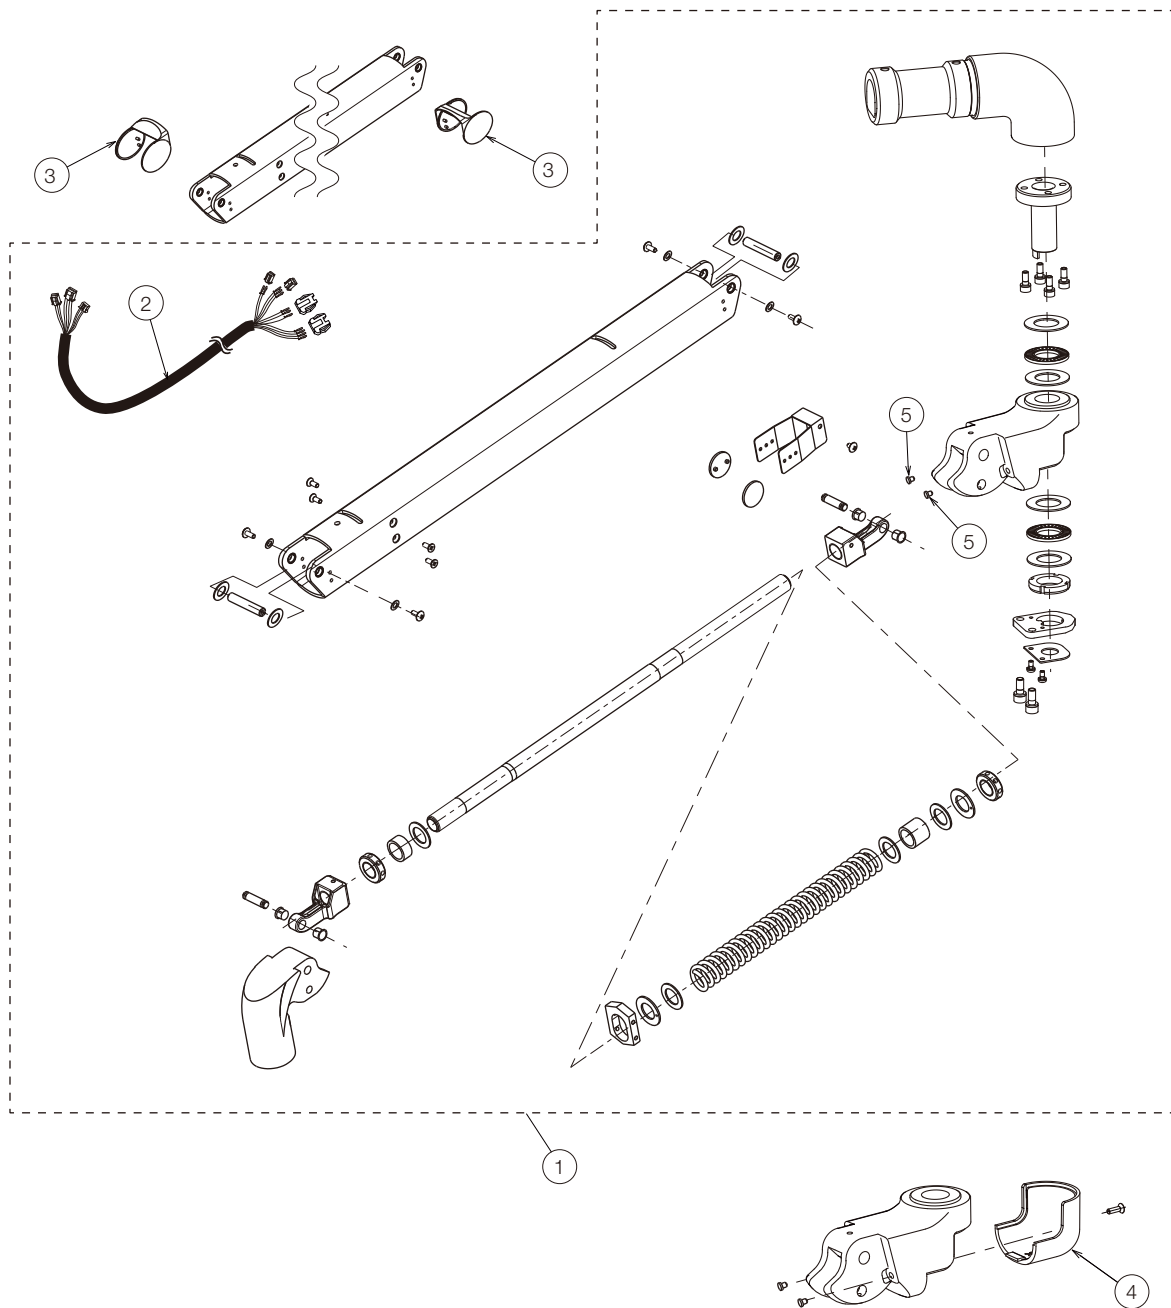

NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1P078EA0	BALANCE ARM ASSY FOR POST/CEILING MOUNT TYPE (CN-80)	1		
	1P078FA0	BALANCE ARM ASSY FOR POST MOUNT TYPE (RAL9003)			
2	1A087KA0	LIGHT CABLE IN ARM (AL-241/242)	1		
3	CARA01A0	ROTATION PART COVER	2		
4	1A07K8A0	JOINT COVER (CN-80)	1		
	1A0821A0	JOINT COVER (RAL9003)			
5	CAMP65A0	LARGE STOPPER (6 NYLON)	2		


ARM SECTION (D245, D247, D248)

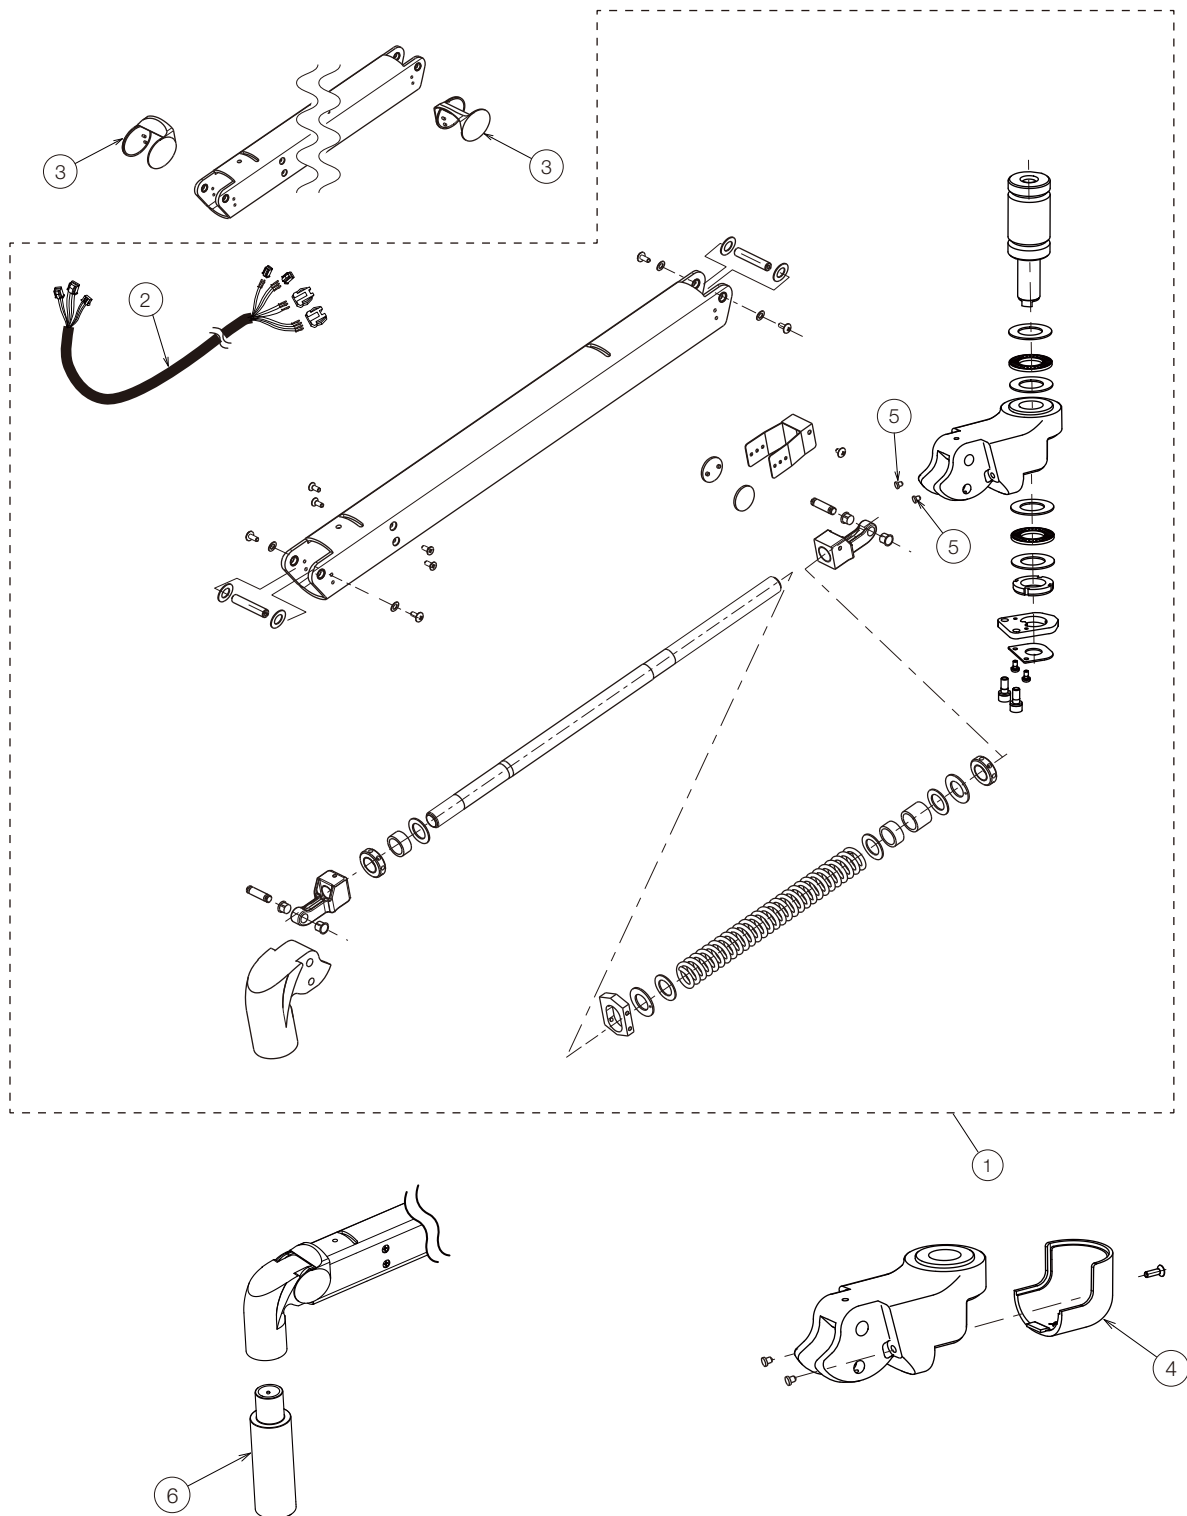


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1P039QA0	BALANCE ARM ASSY (CN-80)	1		
2	1A087SA0	LIGHT CABLE IN ARM	1		
3	CARA01A0	ROTATION PART COVER	2		
4	1A07K8A0	JOINT COVER (CN-80)	1		
5	CAMP65A0	LARGE STOPPER (6 NYLON)	2		
6	1A084SB0	EXTENSION (CN-80)	1		

ARM SECTION (D247, D248)

FOR D247

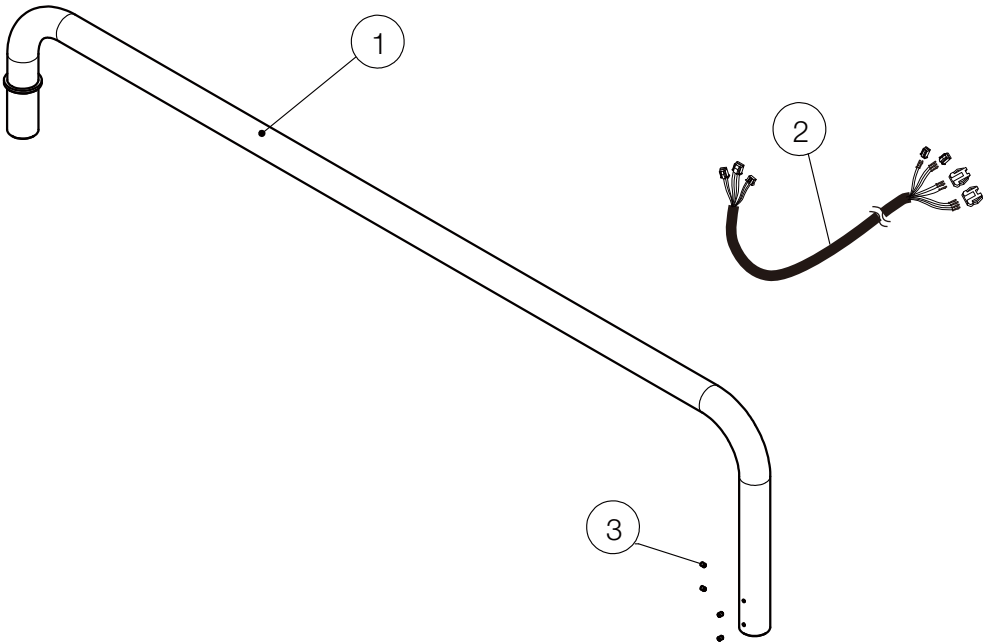


FOR D248

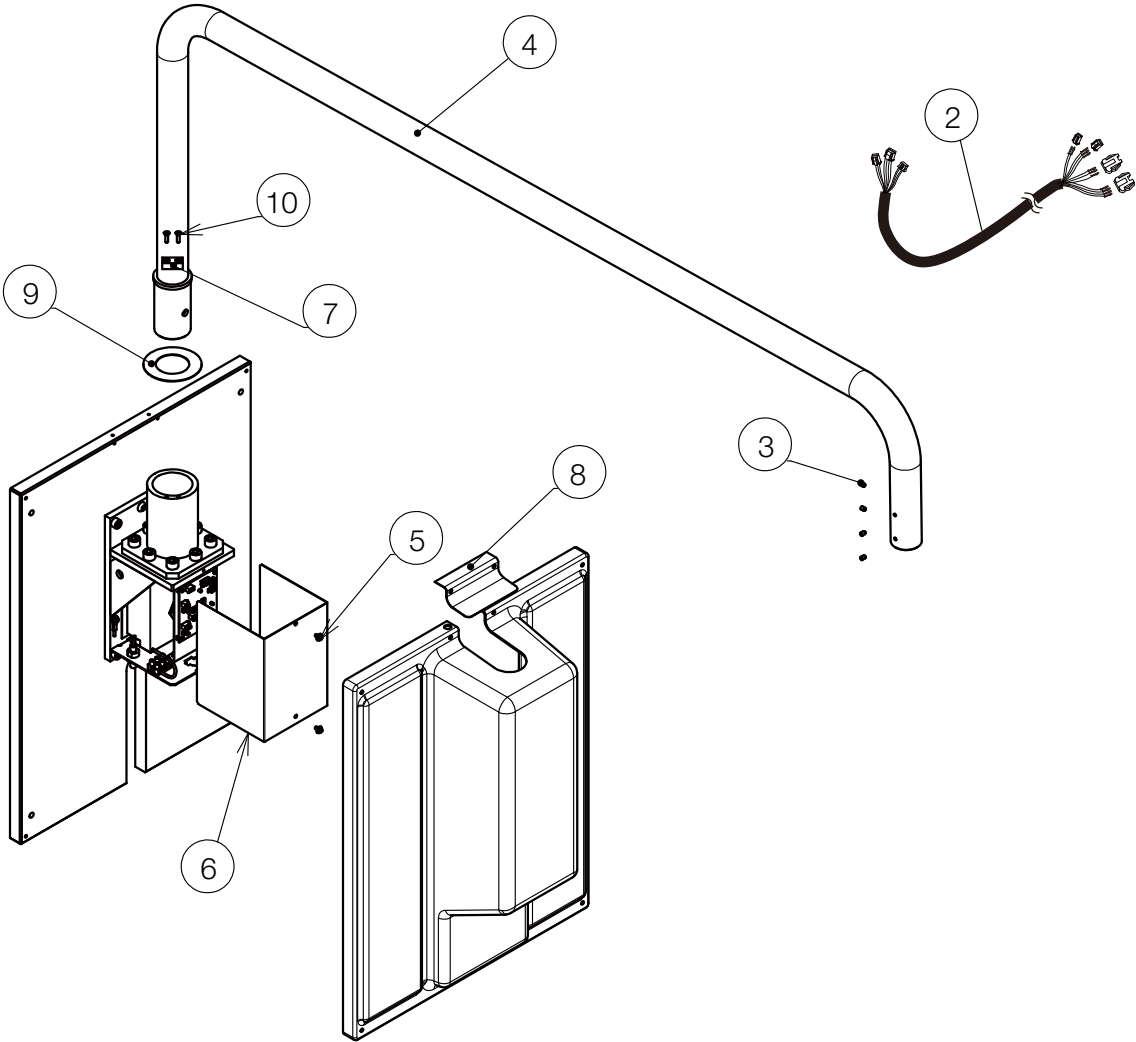



NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A0AH6A0	LIGHT POLE FOR CABINET MOUNT(CN-80)	1		
2	1A09GUB0	LIGHT CABLE IN ARM (D247)	1		
	1A09GNA0	LIGHT CABLE IN ARM (D248)			
3	ZA772NPY	HEX SOCKET SET SCREW M5X8 CHROME	4		
4	1A0ALVA0	LIGHT POLE FOR WALL MOUNT (CN-80)	1		
5	ZA88JLPY	PAN HEAD SEMS SCREW 3P M4X8 CHROME	2		
6	CATP03B0	COVER FOR BRACKET	1		
7	CATP04A0	RETAINER METAL	1		
8	1A0ALZA0	FRONT TOP COVER	1		
9	CATN92A0	POLE DISK	1		
10	ZA112L#U	FLAT HEAD SCREW M4X15 SUS	2		

ARM SECTION (D246G-QU/EV)

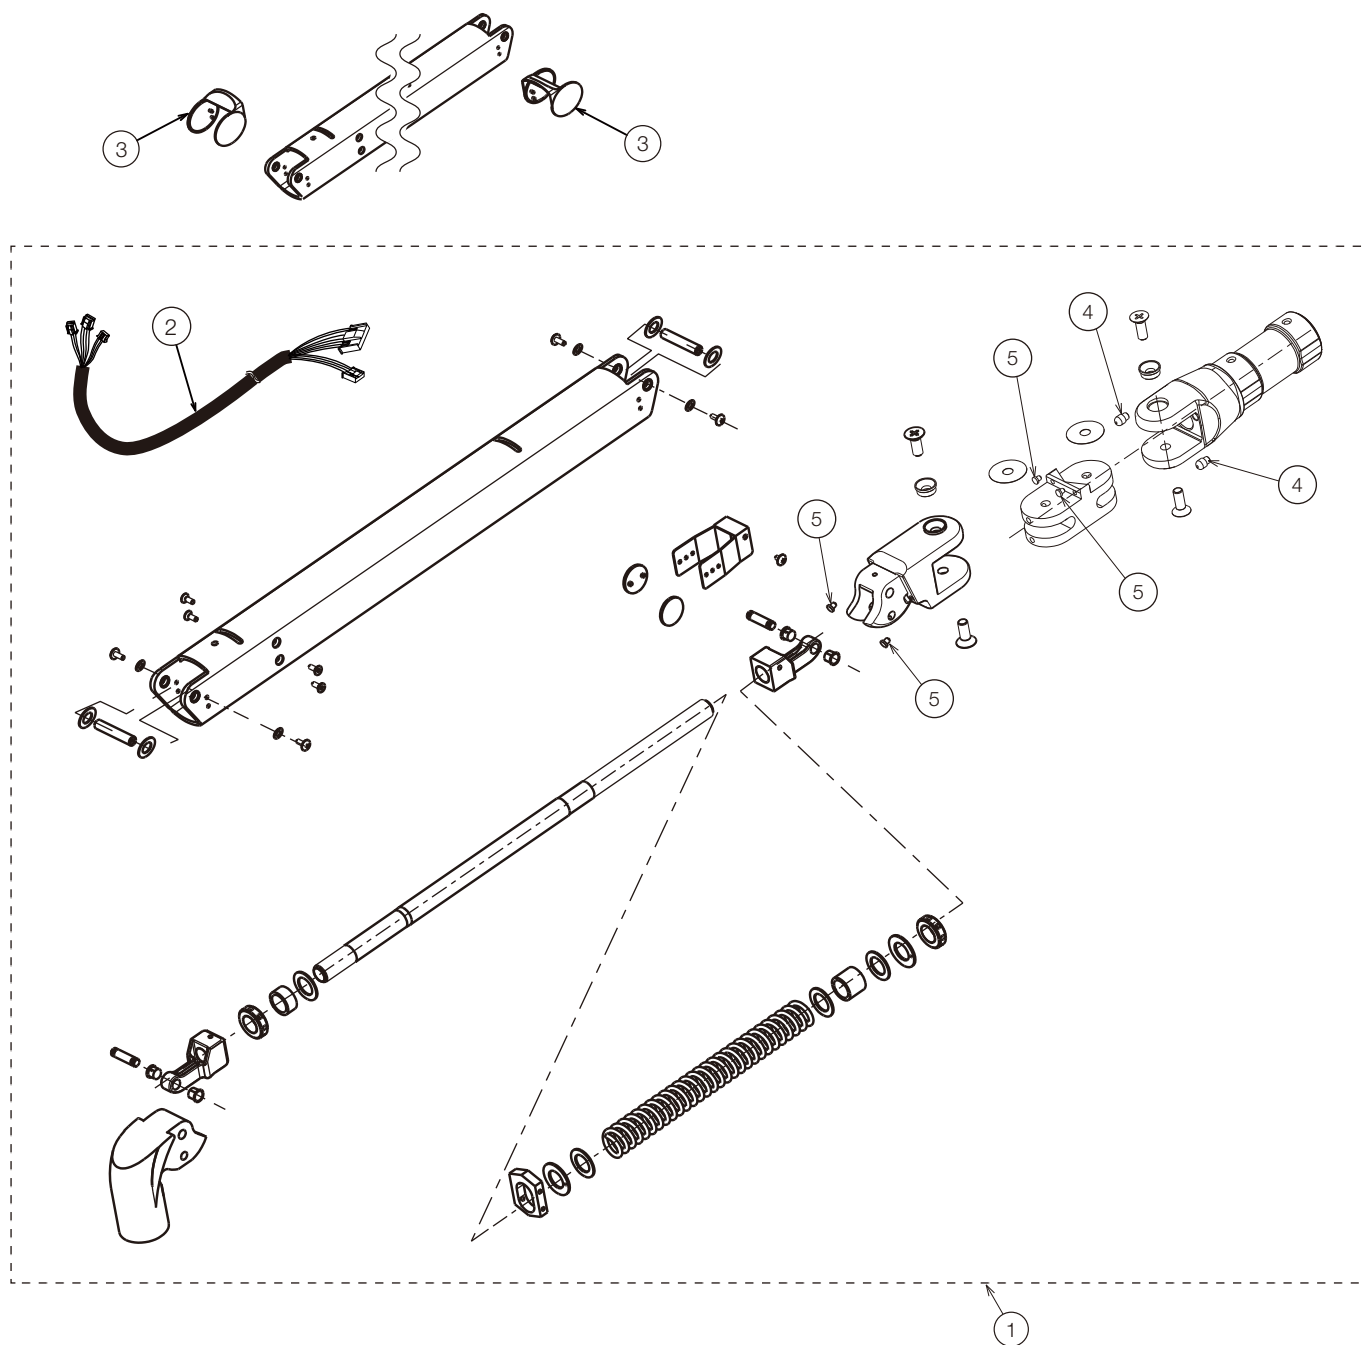


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1P078BA0	BALANCE ARM ASSY FOR UNIT MOUNT TYPE D246G- QU (CN-80)	1		FOR QUOLIS
	1P078CA0	BALANCE ARM ASSY FOR UNIT MOUNT TYPE D246G- EV (CN-80)			FOR EVOGUE
2	1A086VA0	LIGHT CABLE IN ARM FOR D246G-QU	1		FOR QUOLIS
	1A089TB0	LIGHT CABLE IN ARM FOR D246G-EV			FOR EVOGUE
3	CARA01A0	ROTATION PART COVER	2		
4	CATP10A0	STOPPER RL L=7.5 (6 NYLON)	2		
5	CAMP65A0	LARGE STOPPER (6 NYLON)	4		

ARM SECTION (D249)

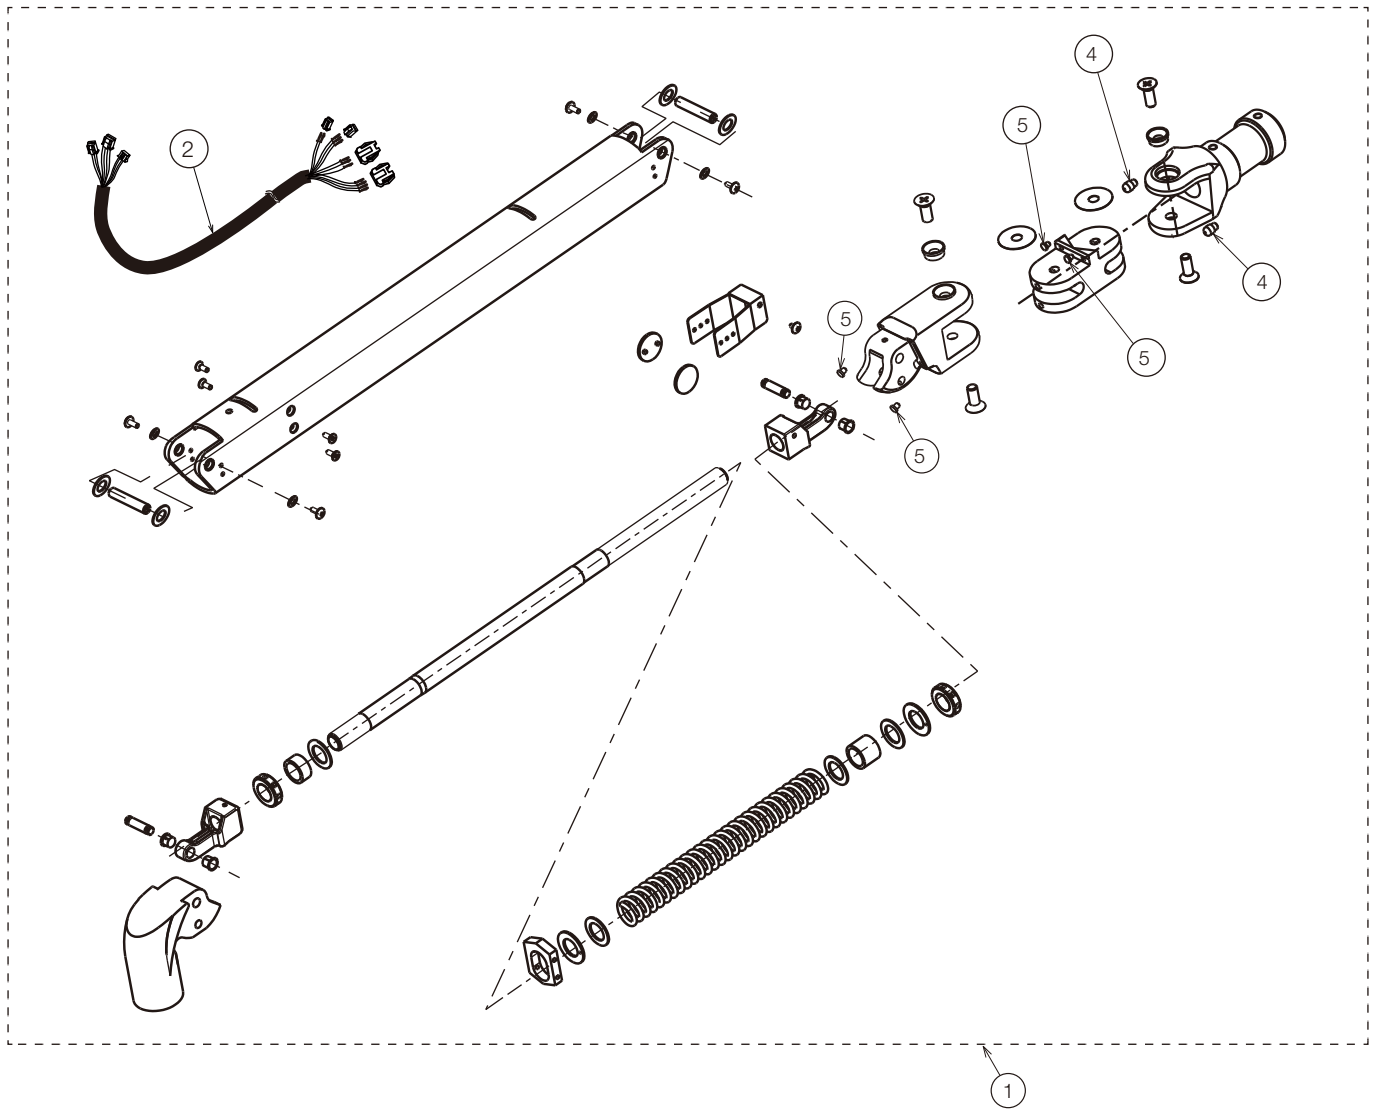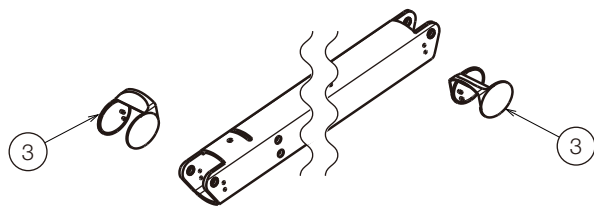


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1P078DA0	BALANCE ARM ASSY FOR UNIT MOUNT TYPE (RAL9003)	1		FOR X-CALIBUR
2	1A089TB0	LIGHT CABLE IN ARM	1		
3	CARA01A0	ROTATION PART COVER	2		
4	CATP10A0	STOPPER RL L=7.5 6 NYLON	2		
5	CAMP65A0	LARGE STOPPER (6 NYLON)	4		

POWER SUPPLY BOX (D241)

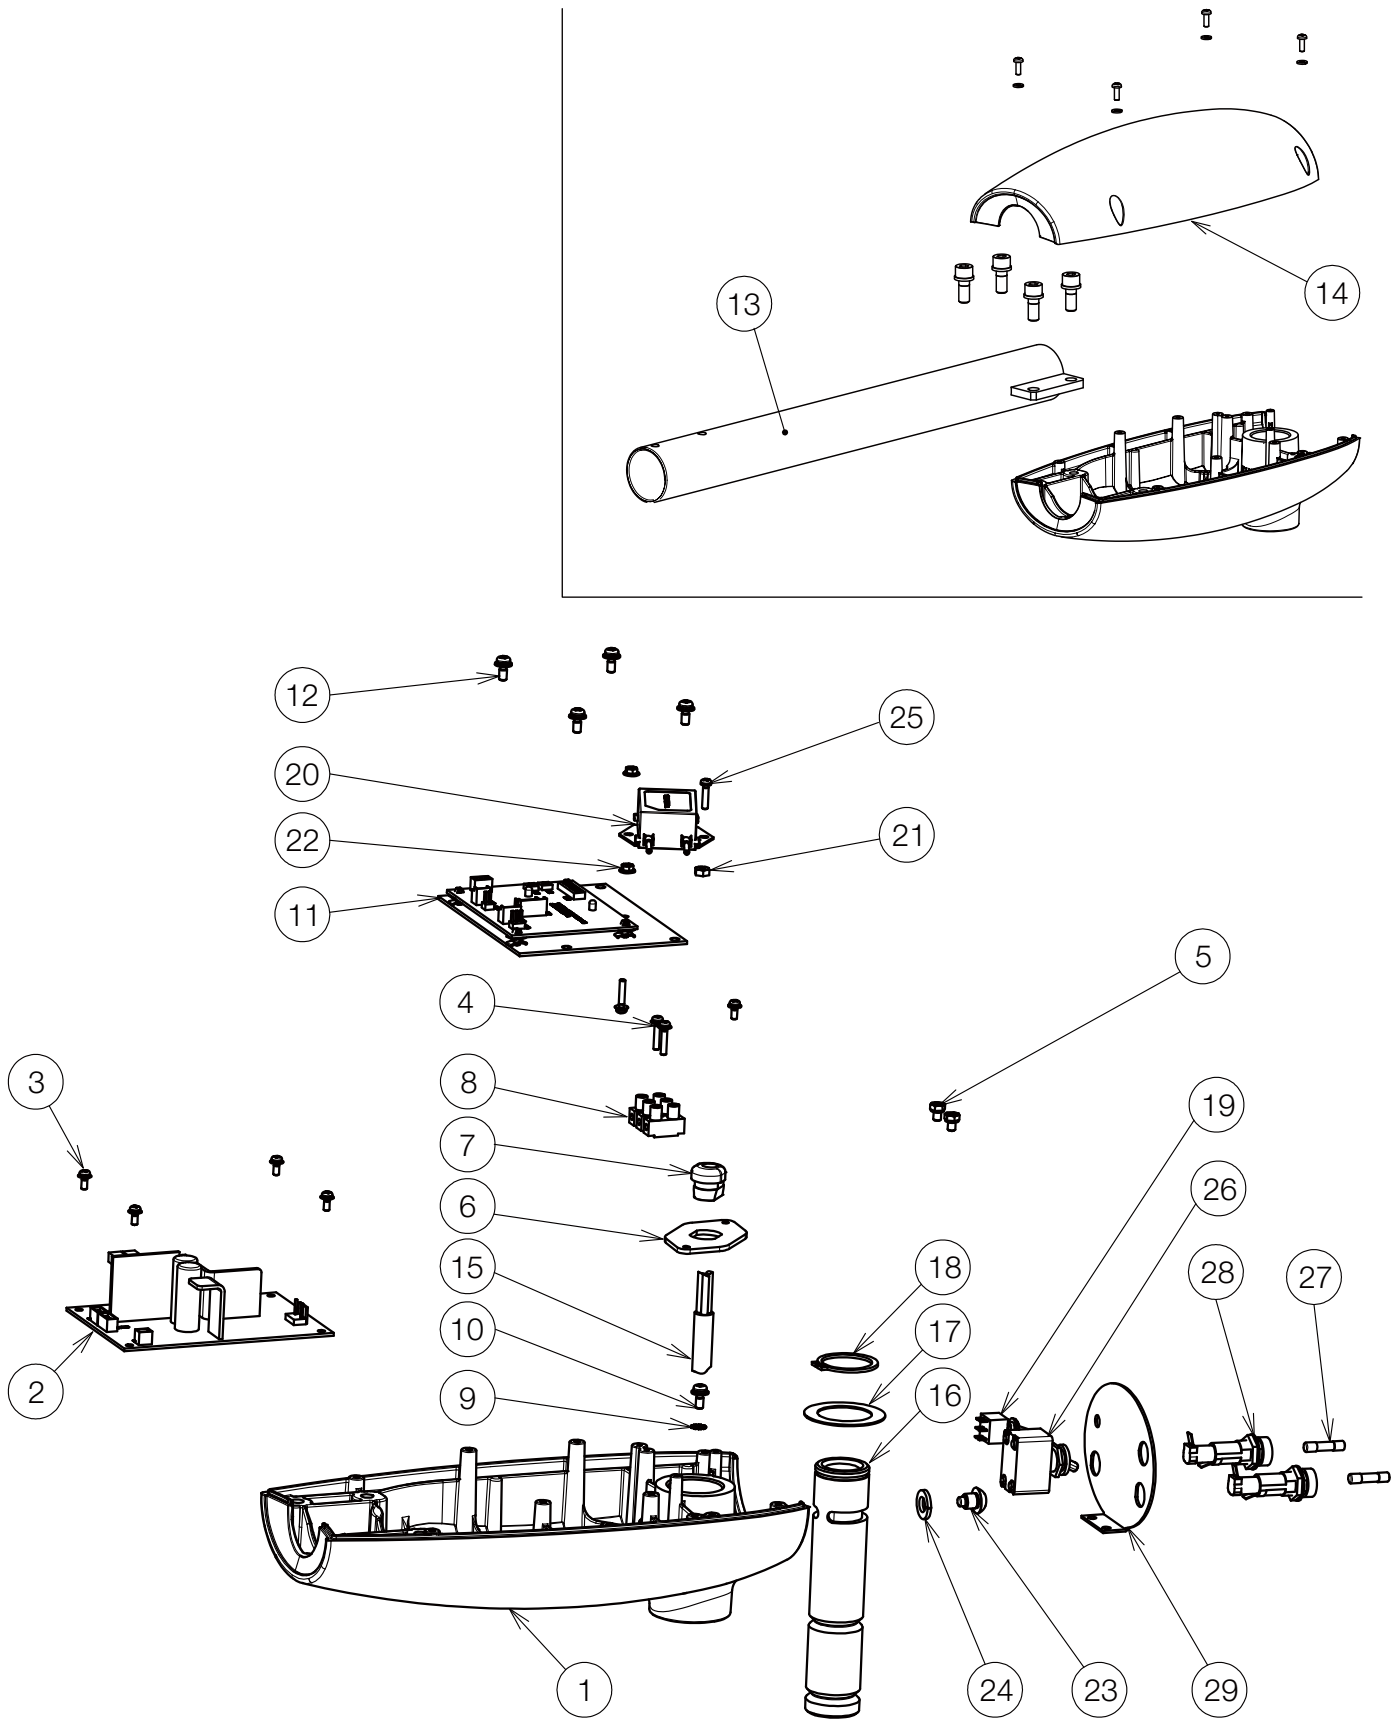


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A07PGA0	TRANSFORMER BOX (CN-80)	1		
	1A082HA0	TRANSFORMER BOX (RAL9003)			
2	1G08K8A0	SWITCHING POWER PCB	1		
3	ZA88JJPY	PAN HEAD SEMS SCREW 3P M3x8 CHROME	5		
4	ZA88JJUY	PAN HEAD SEMS SCREW 3P M3x16 CHROME	3		
5	1E00UKA0	UPSET HEAD BOLT 2P M4X6 CHROME	2		
6	CADQ35A0	CODE BUSH PANEL (70)	1		
7	CEGN46A0	CODE BUSH	1		
8	CAML90B0	CODE HOOK TERMINAL BLOCK	1		
9	ZB552LAY	EXTERNAL TOOTH WASHER M4 CHROME	1		
10	ZA88JLRL	PAN HEAD SEMS SCREW	1		
11	1G09GGA0	SENSOR CONTROL PCB ASSY	1		
12	ZA88JLRY	PAN HEAD SEMS SCREW 3P M4x10 CHROME	4		
13	1A07PLA0	SWIVEL ARM (CN-80)	1		
14	1A07PHA0	TRANSFORMER BOX COVER (CN-80)	1		
	1A082JA0	TRANSFORMER BOX COVER (RAL9003)			
15	1A0XNAA0	POWER CODE	1		
16	1A07W1B0	ROTATION SHAFT	1		
17	CAND32A0	WASHER 43X29X0.8	1		
18	CENX94A0	C-RING	1		
19	AEQO79B0	TRUNK LINE FOR SENSOR/MANUAL MODE SWITCH ASSY	1		
20	1G0A33A0	NOISE FILTER	1		
21	ZA812LAY	HEX NUT M4 CHROME	1		
22	ZA811JA_	HEX NUT M3X0.5	2		
23	1A07W2A0	ROTATION STOPPER BOLT M8	1		
24	ZB511PAY	SPRING WASHER M8 CHROME	1		
25	ZA887JTY	PAN HEAD SEMS SCREW 2P M3x14 CHROME	1		
26	CENX56B0	SWITCH (6A)	1		
27	CEEN94A0	FUSE 250V 0.8A (T)	2		
28	AEFR93B0	FUSE HOLDER 250V-10A	2		
29	1A07WWA0	BACK PLATE (CN80) *SILK PRINTED	1		
	1A082MA0	BACK PLATE (RAL9003) *SILK PRINTED			

POWER SUPPLY BOX (D242)

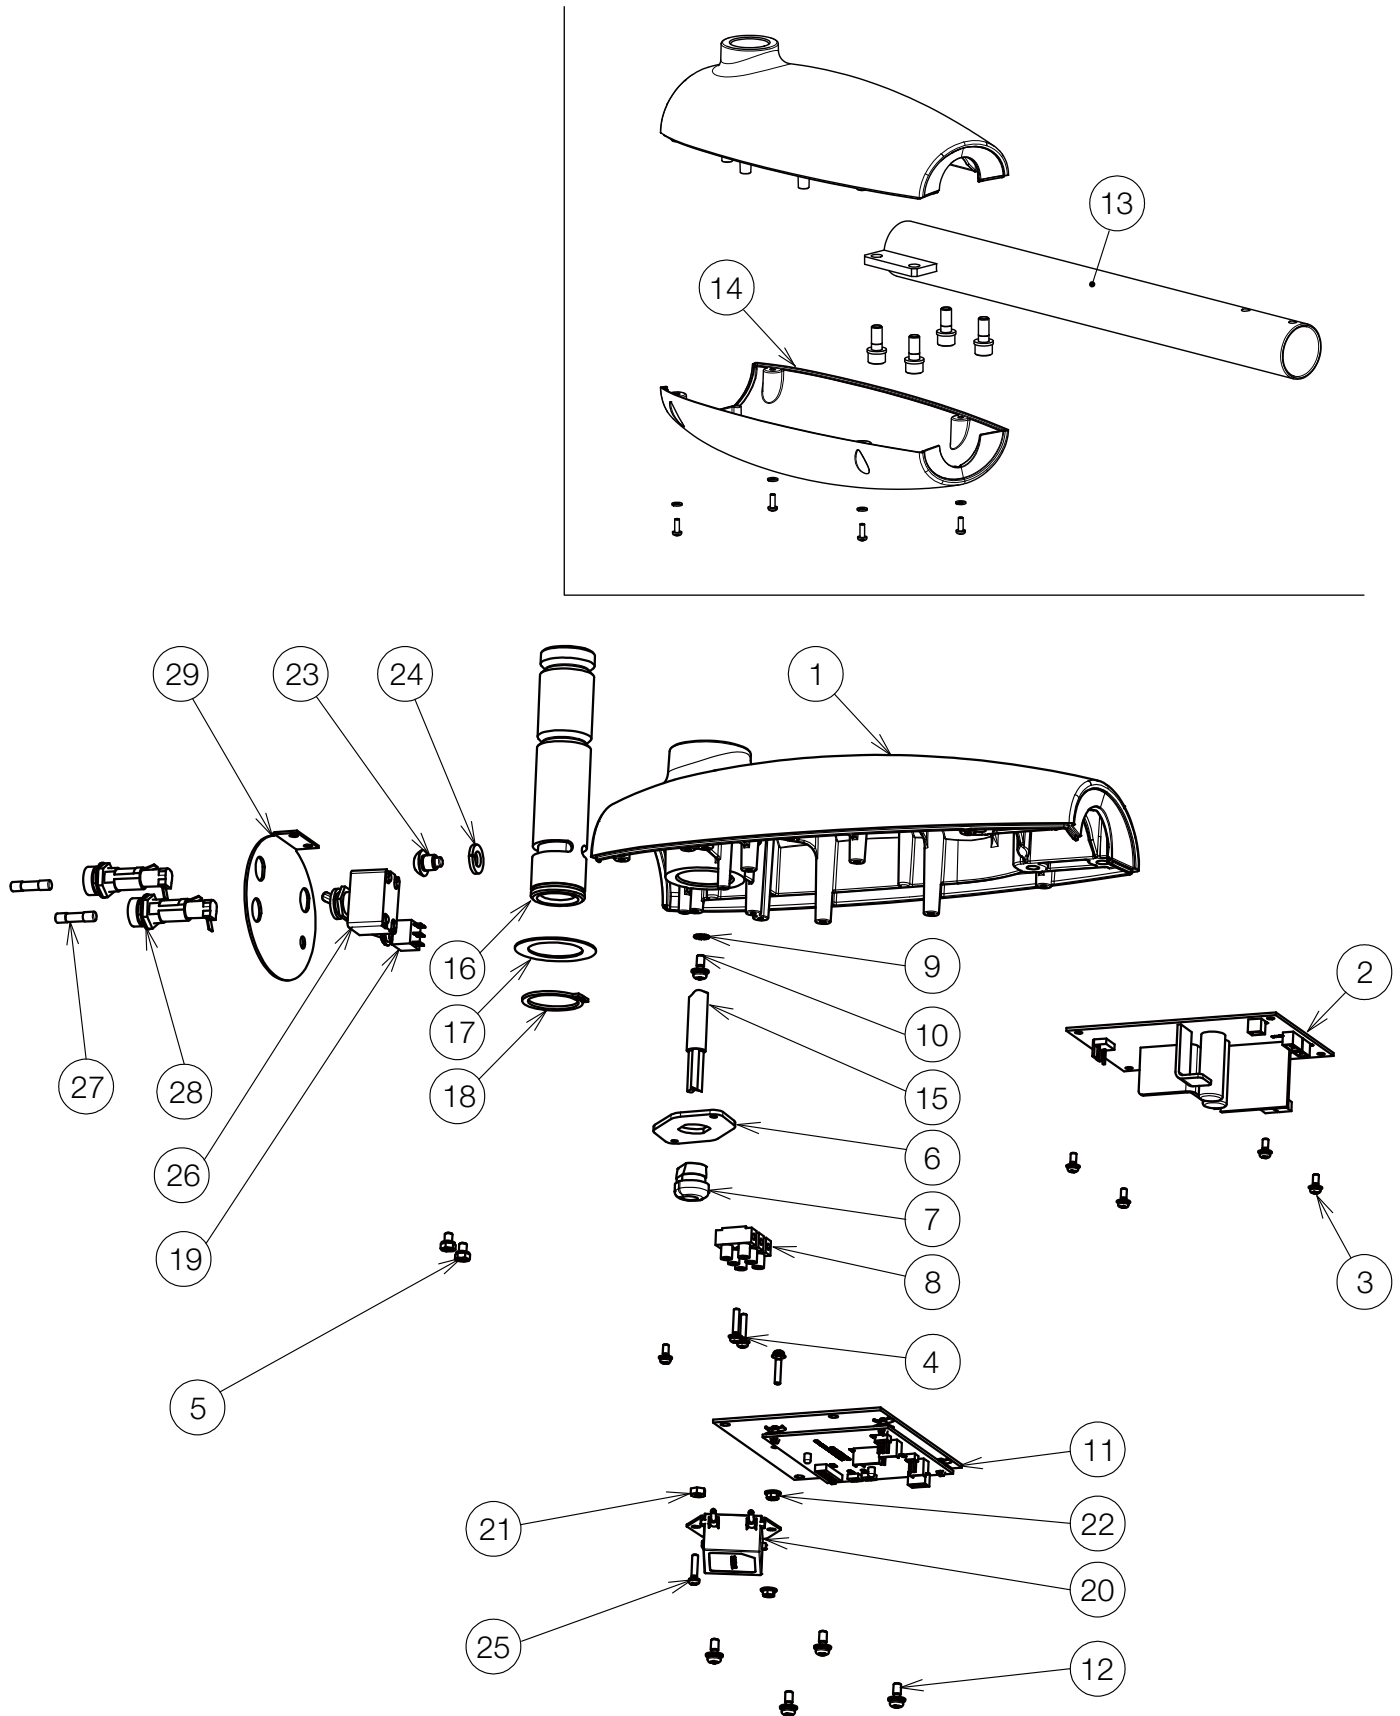


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A07PGA0	TRANSFORMER BOX (CN-80)	1		
2	1G08K8A0	SWITCHING POWER PCB	1		
3	ZA88JJPY	PAN HEAD SEMS SCREW 3P M3x8 CHROME	5		
4	ZA88JJUY	PAN HEAD SEMS SCREW 3P M3x16 CHROME	3		
5	1E00UKA0	UPSET HEAD BOLT 2P M4X6 CHROME	2		
6	CADQ35A0	CODE BUSH PANEL (70)	1		
7	CEGN46A0	CODE BUSH	1		
8	CAML90B0	CODE HOOK TERMINAL BLOCK	1		
9	ZB552LAY	EXTERNAL TOOTH WASHER M4 CHROME	1		
10	ZA88JLRL	PAN HEAD SEMS SCREW 3P M4x10 BS	1		
11	1G09GGA0	SENSOR CONTROL PCB ASSY	1		
12	ZA88JLRY	PAN HEAD SEMS SCREW 3P M4x10 CHROME	4		
13	1A07PLA0	SWIVEL ARM (CN-80)	1		
14	1A07PHA0	TRANSFORMER BOX COVER (CN-80) *COATED	1		
15	1A0XNBA0	POWER CORD	1		
16	1A07W1B0	ROTATION SHAFT	1		
17	CAND32A0	WASHER 43X29X0.8	1		
18	CENX94A0	C-RING	1		
19	AEQO79B0	TRUNK LINE FOR SENSOR/MANUAL MODE SWITCH ASSY	1		
20	1G0A33A0	NOISE FILTER	1		
21	ZA812LAY	HEX NUT M4X0.7	1		
22	ZA811JA_	HEX NUT M3X0.5	2		
23	1A07W2A0	ROTATION STOPPER BOLT M8	1		
24	ZB511PAY	SPRING WASHER M8 CHROME	1		
25	ZA887JTY	PAN HEAD SEMS SCREW 2P M3x14 CHROME	1		
26	CENX56B0	SWITCH (6A)	1		
27	CEEN94A0	FUSE 250V 0.8A (T)	2		
28	AEFR93B0	FUSE HOLDER 250V-10A	2		
29	1A07PJA0	REAR PLATE (CN80)	1		

POWER SUPPLY BOX (D245)

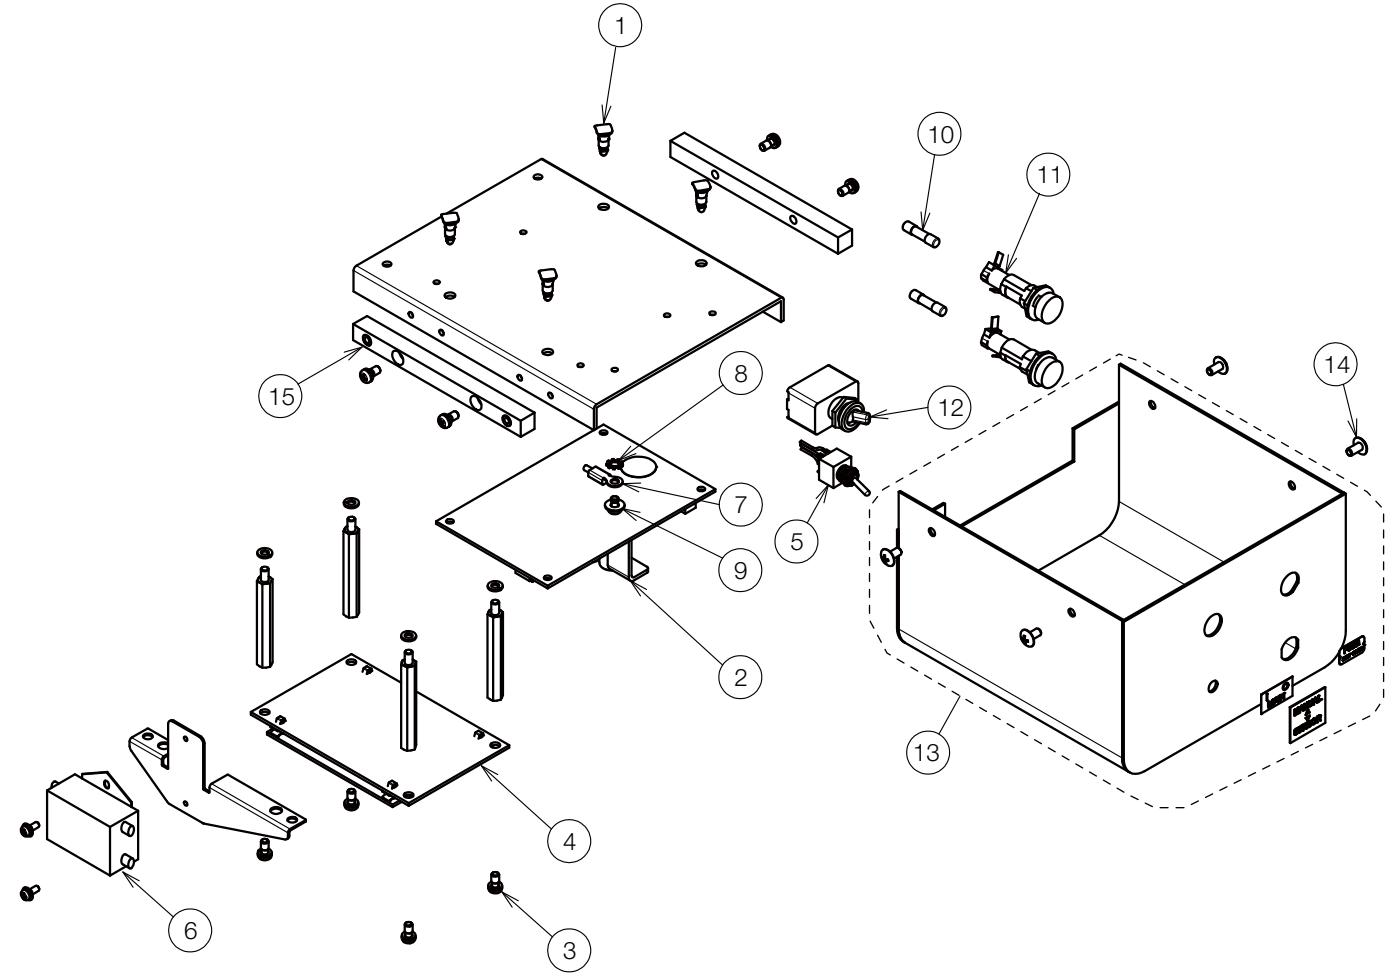


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	DESR05A0	SPACER	4		
2	1G08K8A0	SWITCHING POWER PCB	1		
3	ZA887LPY	PAN HEAD SEMS SCREW 2P M4x8 CHROME	8		
4	1G07WVA0	SENSOR CONTROL PCB ASSY	1		
5	1A0STYB0	SENSOR/MANUAL MODE SWITCH ASSY WITH WIRE	1		
6	1G0A3MA0	NOISE FILTER ASSY	1		
7	1A087NA0	EARTH LEAD GREEN/YELLOW 500MM	1		
8	ZB552LAY	EXTERNAL TOOTH WASHER M4 CHROME	1		
9	ZA88JLNM	PAN HEAD SEMS SCREW 3P M4x6 BSNI	1		
10	CEEN94A0	FUSE 250V 0.8A (T)	2		
11	AEFR93B0	FUSE HOLDER 250V-10A	2		
12	CENX56B0	SWITCH (6A)	1		
13	1P078AA0	COVER FOR TRANSFORMER BOX	1		
14	1E01HHA0	TRUSS M4X8 RAL9003	4		
15	1A082EA0	INSULATED PLATE FOR TRANSFORMER BOX	2		

POWER SUPPLY BOX (D247)

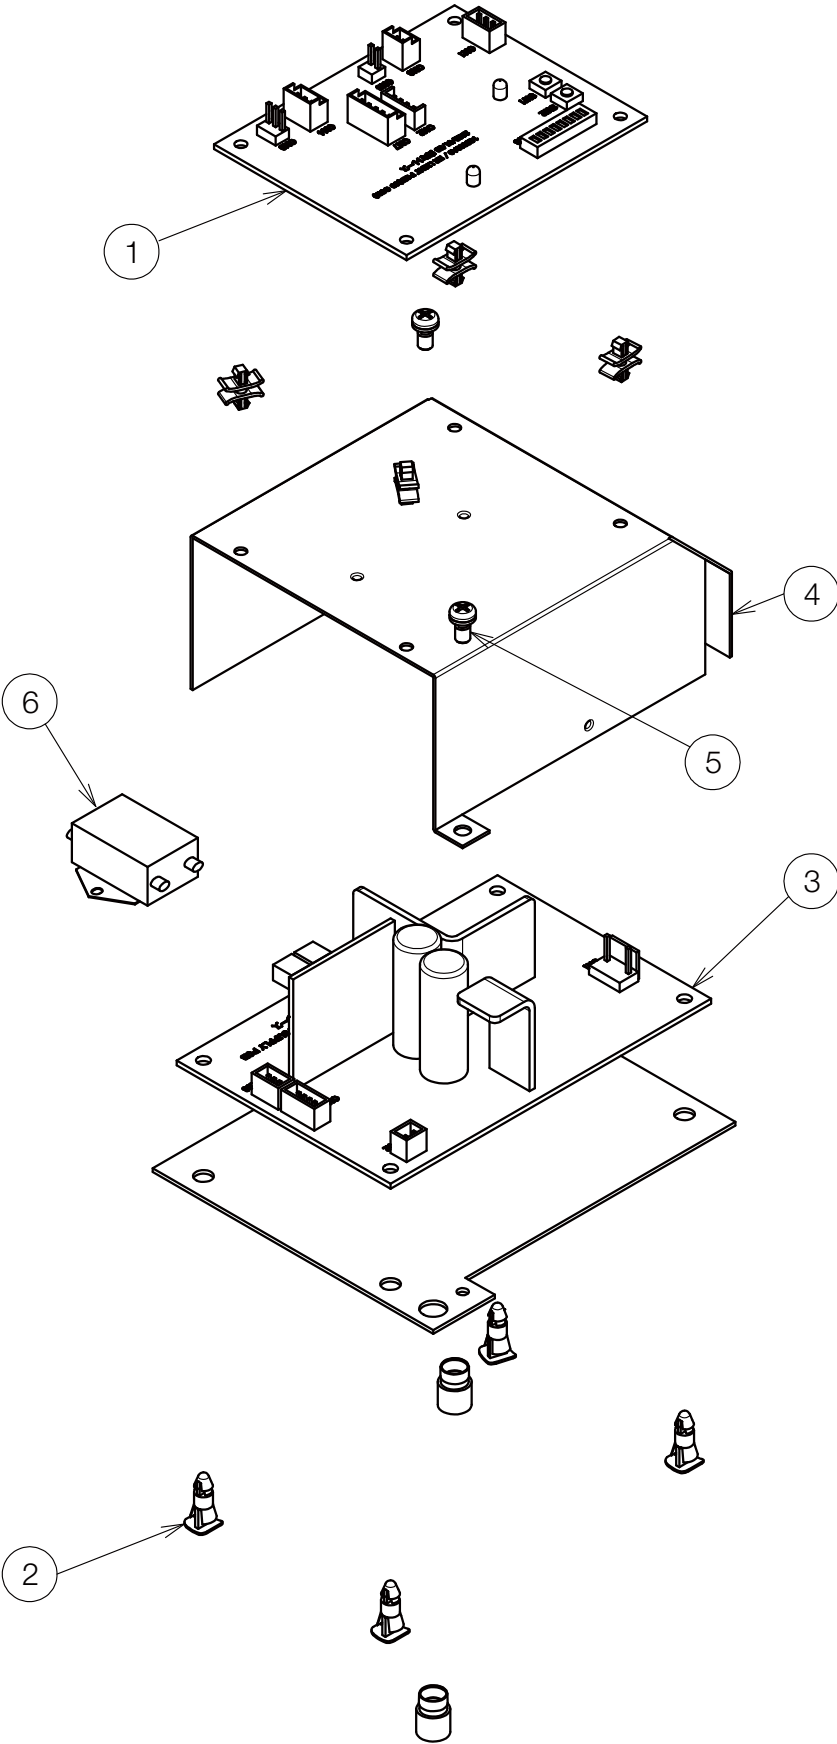


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1G0803C0	LIGHT CONTROL PCB	1		
2	DESR05A0	SPACER	4		
3	1G08K8A0	SWITCHING POWER PCB	1		
4	1A07X1D0	COVER FOR POWER PCB	1		
5	ZA887LPY	PAN HEAD SEMS SCREW 2P M4X8 CHROME	2		
6	1G0A3VA0	NOISE FILTER ASSY WITH WIRE	1		

POWER SUPPLY BOX (D248)

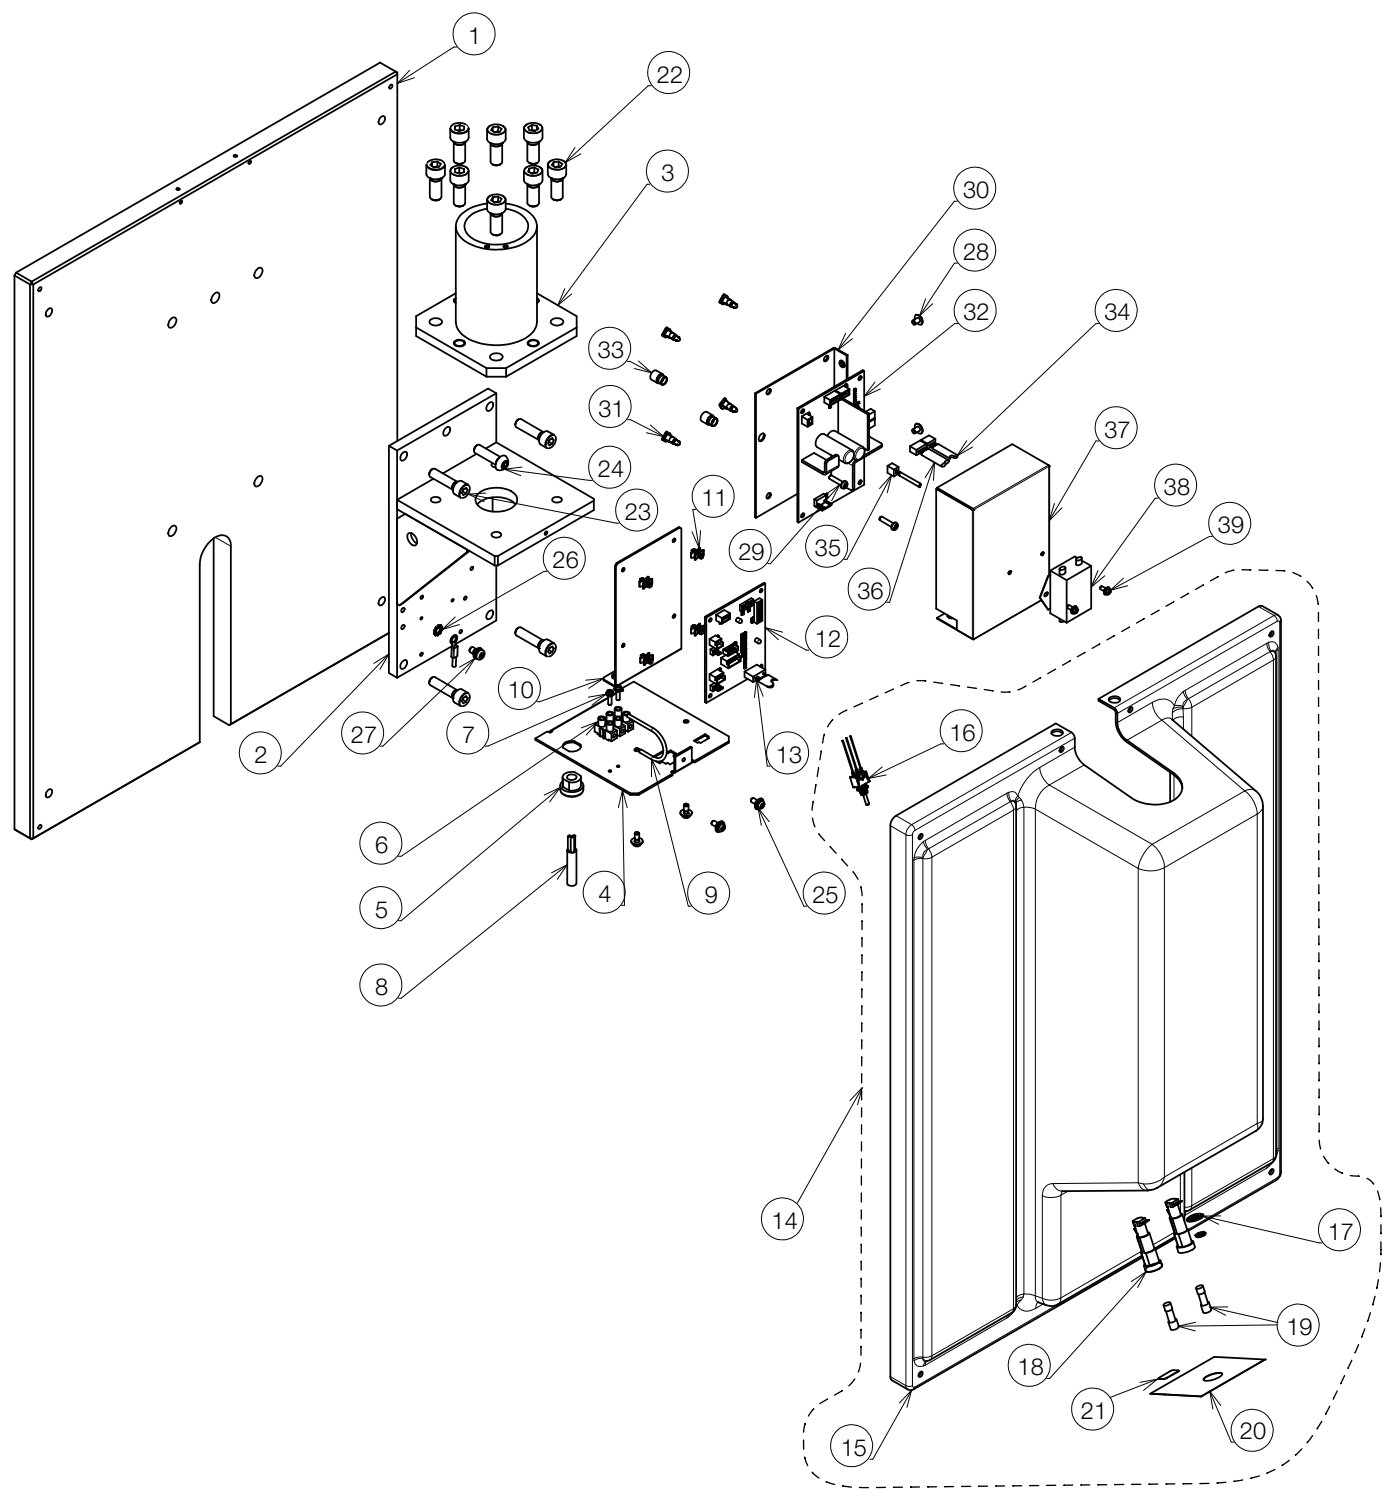


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A0QB3A0	WALL PLATE FOR EPA	1		
2	CATN01D0	BRACKET FOR WALL	1		
3	CATN02B0	BRACKET FOR LIGHT POLE	1		
4	1A0ALWA0	BOTTOM PLATE	1		
5	CESN07A0	BUSH	1		
6	CAML90B0	TERMINAL BLOCK	1		
7	ZA88MJSY	PAN HEAD SEMS SCREW 4P M3x12 CHROME	2		
8	1A04CZA0	CT CODE 2000L	1		
9	1A04CXA0	EARTH WIRE 200L	1		
10	1A0ALXA0	PLATE FOR PCB	1		
11	CERN39A0	SPACER	4		
12	1G0803A0	LIGHT CONTROL PCB	1		
13	1A0SU8A0	TRUNK LINE A FOR SENSOR/MANUAL SWITCH	1		
14	1G0827A0	FRONT COVER SET	1		
15	1A0ALYA0	FRONT COVER CN80	1		
16	1A0SU9A0	TRUNK LINE B FOR SENSOR/MANUAL SWITCH	1		
17	1A07PYC0	SPACER FOR SENSOR/MANUAL SWITCH	1		
18	AEFR93B0	FUSE HOLDER 250V-10A	2		
19	CEEN94A0	FUSE 250V 0.8A (T)	2		
20	CATP11B0	LABEL FOR SENSOR/MANUAL	1		
21	CAEP84B0	FUSE LABEL 0.8 A (T)	1		
22	ZA761QYU	HEX SOCKET HEAD SCREW M10x25 SUS	8		
23	CETN56A0	HEX SOCKET HEAD SCREW M8x32 BLACK CHROME	4		
24	ZSA11PZG	HEX BUTTON HEAD SCREW M8x30 BLACK	1		
25	ZA88JLRY	PAN HEAD SEMS SCREW 3P M4x10 CHROME	4		
26	ZB552NAM	EXTERNAL TOOTH WASHER M5 BRASS NICKEL	1		
27	ZA88JNRL	PAN HEAD SEMS SCREW 3P M5x10 BRASS	1		
28	ZA114LNY	TRUSS M4x6 CHROME	2		
29	ZA111LUC	PAN HEAD SCREW M4x16 CHROME	2		
30	1A07X7A0	BRACKET FOR POWER PCB	1		
31	DESR05A0	SPACER	4		
32	1G08K8A0	POWER SUPPLY PCB	1		
33	1E02FBA0	SNAP COLOR BUSH	2		
34	1A0STXA0	TRUNK LINE FOR ADJUST PULSE	1		
35	1A07MPA0	TRUNK LINE A FOR CONTROL PCB	1		
36	1A07MRA0	TRUNK LINE FOR LED MODULE	1		
37	1A07Z9B0	POWER PCB BOX	1		
38	1G0A3DA0	NOISE FILTER ASSY	1		
39	ZA88JJPY	PAN HEAD SEMS SCREW 3P M3x8 CHROME	2		

POWER SUPPLY BOX (D246G-QU)

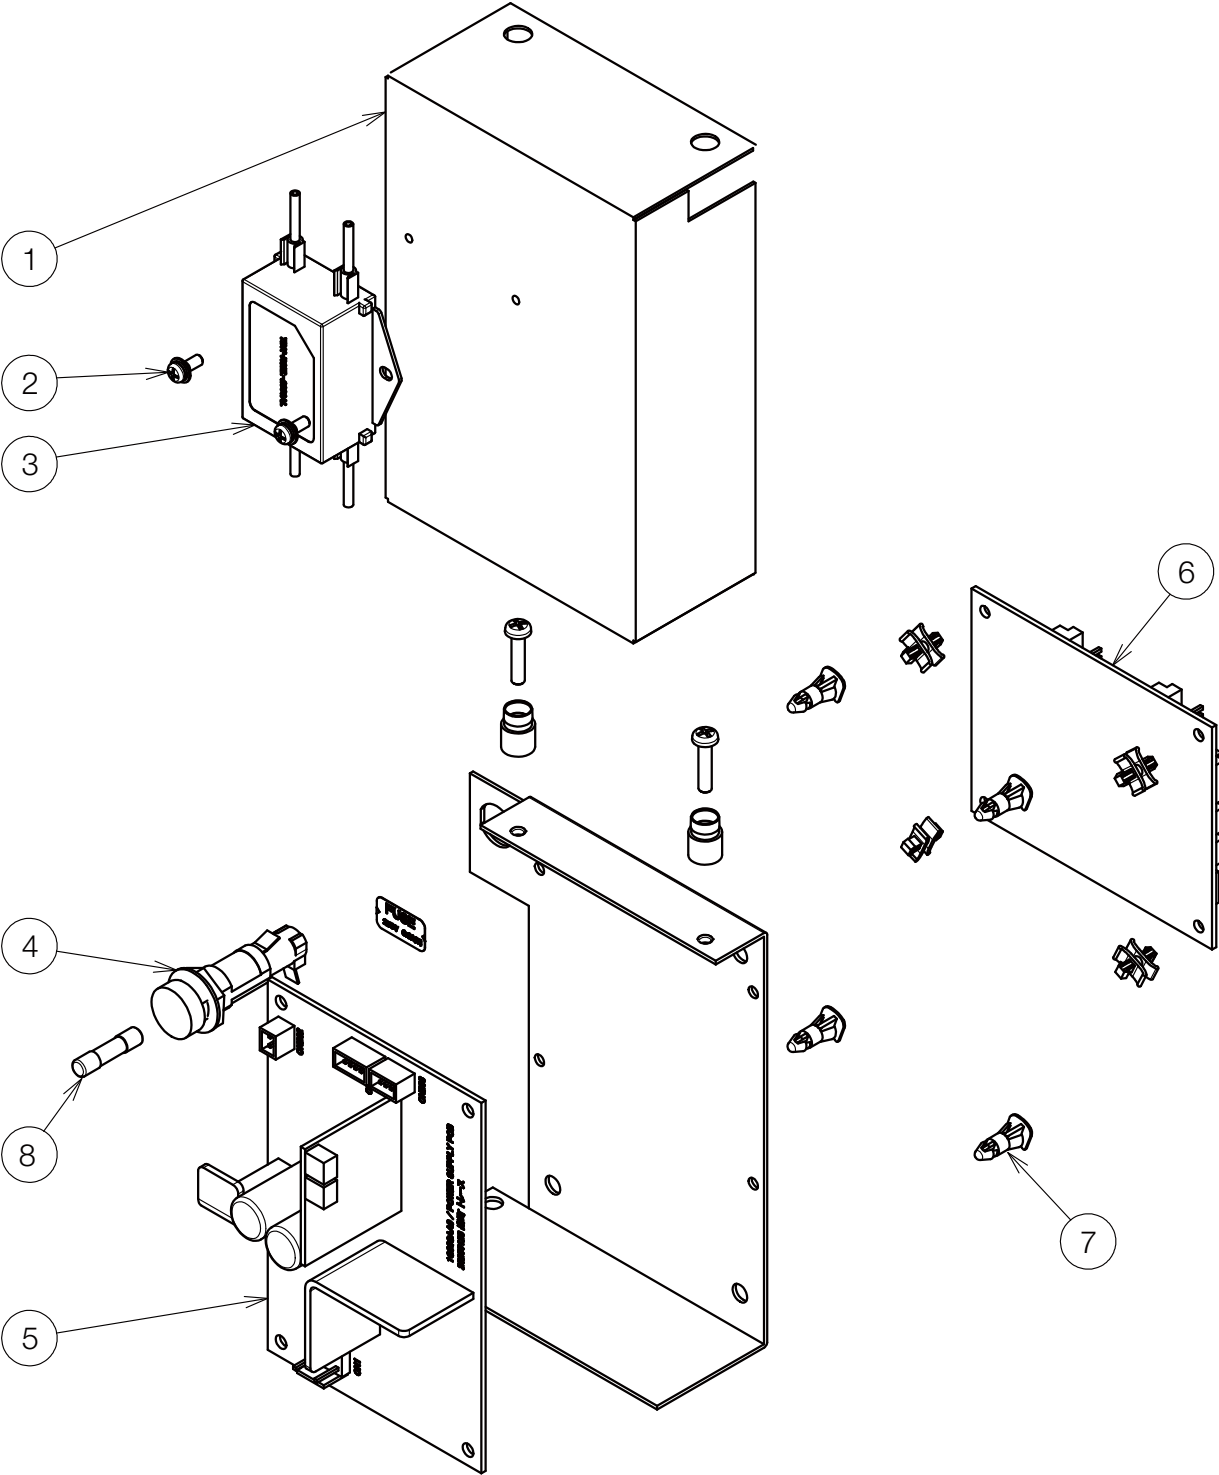


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A07Z9B0	POWER PCB BOX	1		
2	ZA88JJPY	PAN HEAD SEMS SCREW 3P M3x8 CHROME	2		
3	1A08AGB0	NOISE FILTER ASSY	1		
4	AEFR93B0	FUSE HOLDER 250V-10A	1		
5	1G08K8A0	SWITCHING POWER PCB	1		
6	1G07PBD0	EURUS LIGHT CTL PCB	1		
7	DESR05A0	SPACER	4		
8	CEEN94A0	FUSE 250V 0.8A (T)	1		

SWITCH BOX (D246G-QU)

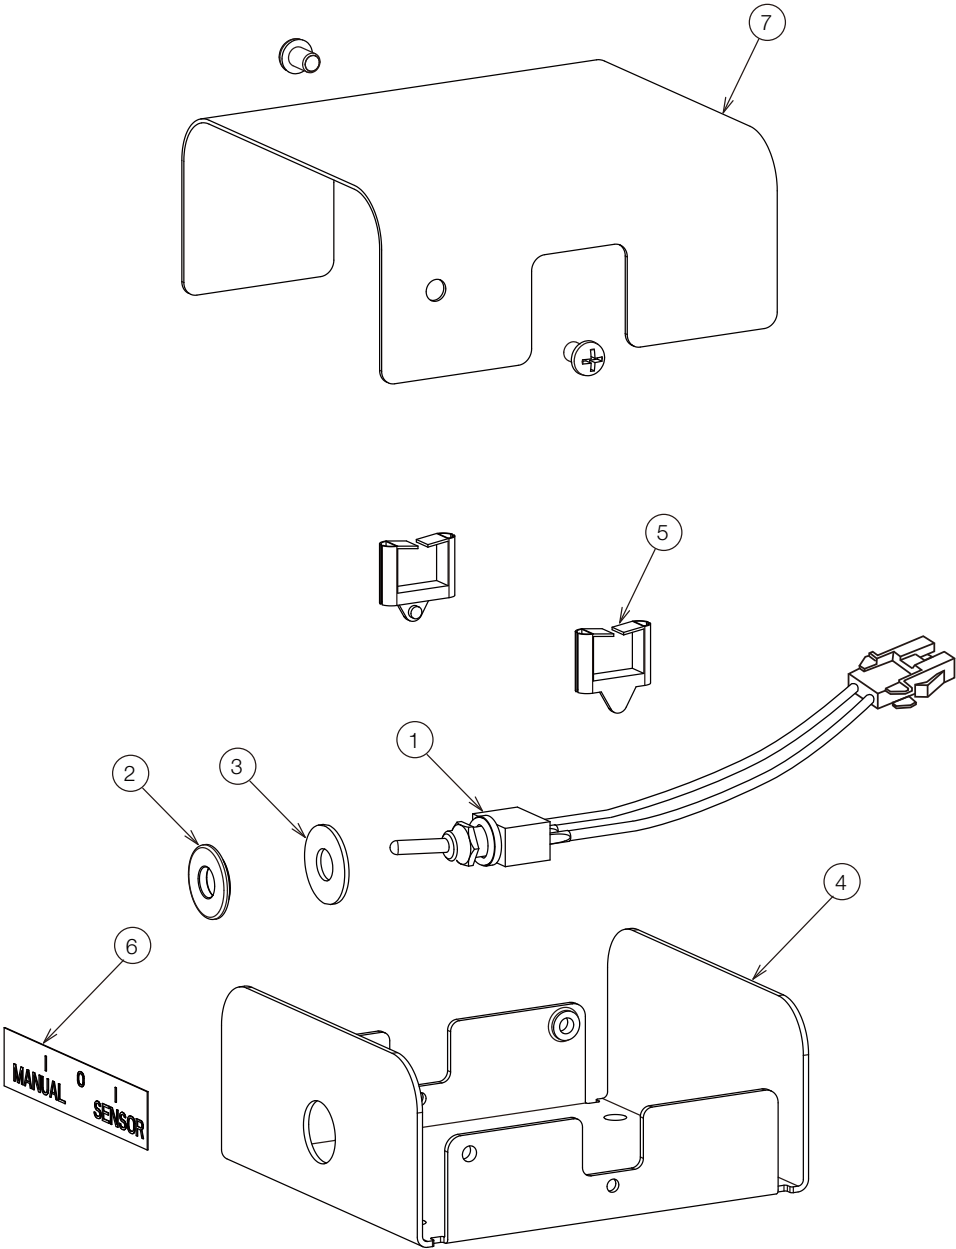


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A086ZA0	SENSOR/MANUAL CHANGING SWITCH	1		
2	1A07PYC0	SPACER FOR SENSOR/MANUAL SWITCH	1		
3	1E00V3A0	WASHER M6x16x1.0 CHROME	1		
4	CAGP86A1	FLAME FOR SWITCH BOX	1		
5	CEGN75A0	EDGE SADDLE	2		
6	CAJC01A0	POWER SWITCH LABEL	1		
7	CAGP87A1	COVER FOR SWITCH BOX	1		

TRANSFORMER BOX SECTION (D246G-EV, D249)

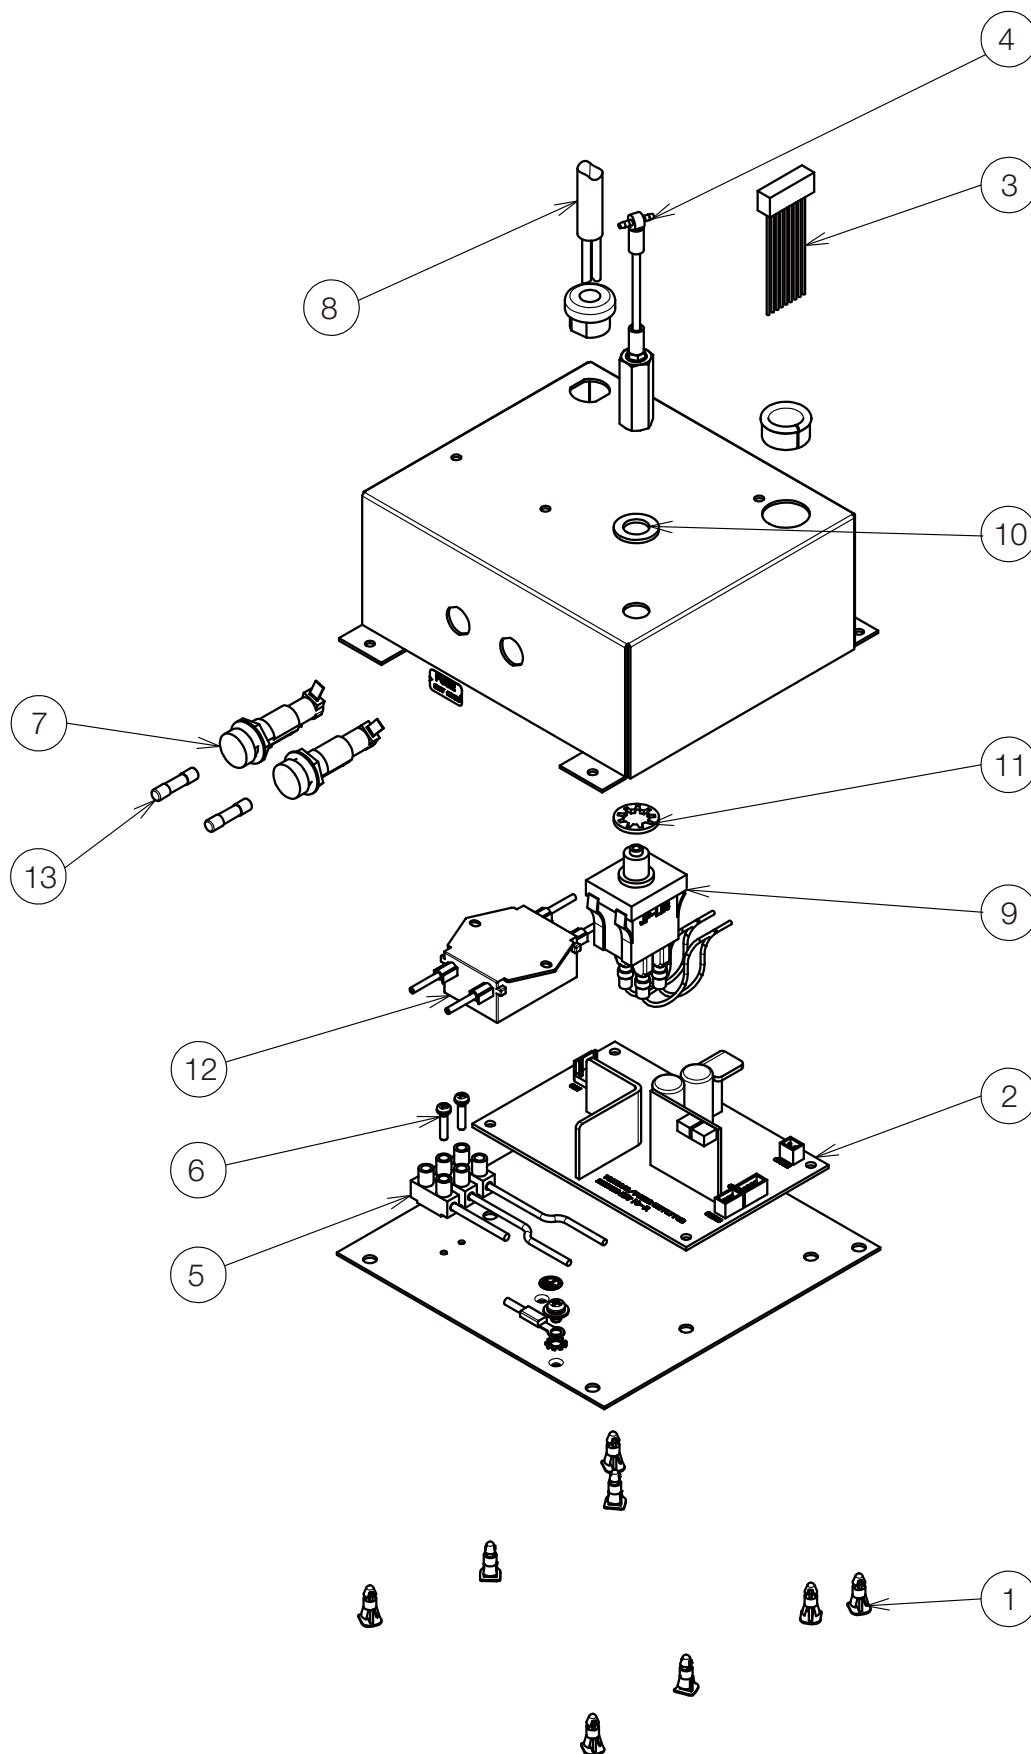


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	DESR05A0	SPACER	8		
2	1G08K8A0	SWITCHING POWER PCB	1		
3	1A0SUFA0	TRUNK LINE FOR POWER PCB	1		
4	1G02MBA0	AIR SWITCHASSY	1		
5	1G0A3WA0	TERMINAL BLOCK ASSY	1		
6	ZA887JTY	PAN HEAD SEMS SCREW 2P M4x8 CHROME	2		
7	AEFR93B0	FUSE HOLDER 250V-10A	2		
8	1A04D6A0	CT CODE 1000L	1		
9	1A0H4TB0	AIR SWITCH ASSY	1		
10	1E00A7A0	WASHER M10X22X2.4 CHROME	1		
11	ZB551QAY	INTERNAL TOOTH WASHER M10 CHROME	1		
12	1G0A3UA0	NOISE FILTER ASSY	1		
13	CEEN94A0	FUSE 250V 0.8A (T)	2		

SWITCH BOX (D246G-EV , D249W-X)

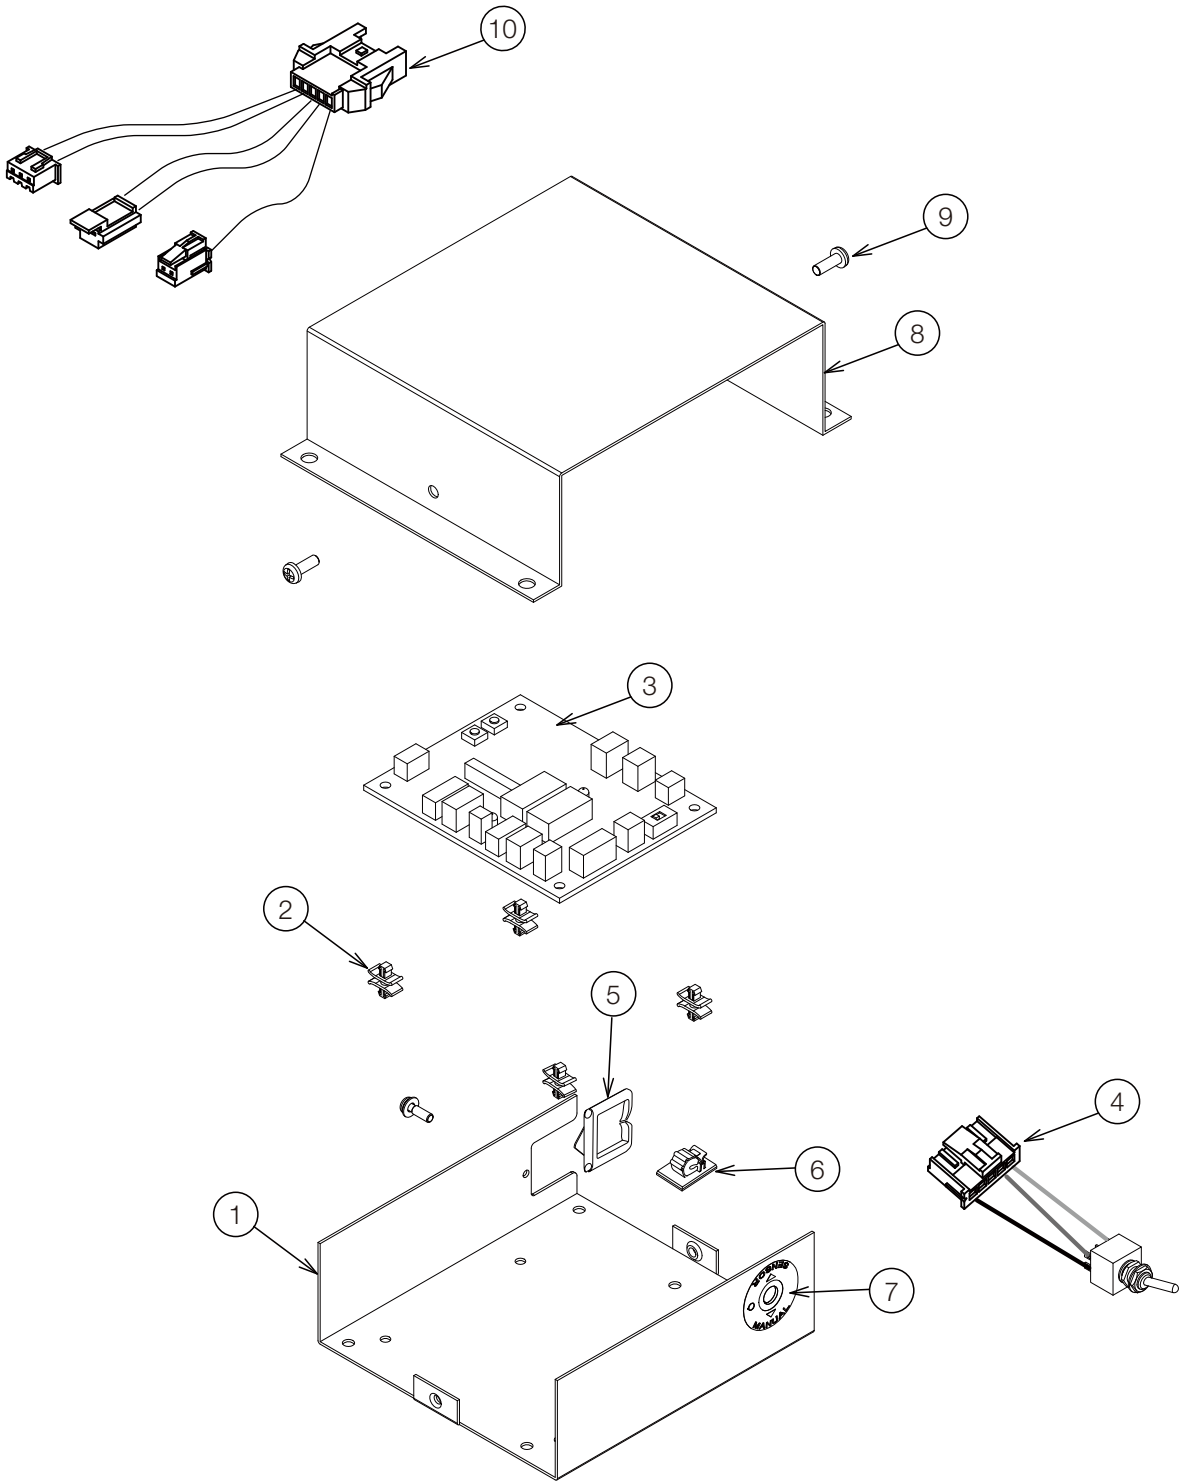


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A08CTA0	SWITCH BOX (RAL9003)	1		
	1A0HVMA0	SWITCH BOX (CN80)			
2	CERN39A0	DOUBLE LOCKING SPACER	4		
3	1G0803C0	LIGHT CONTROL PCB	1		
4	1A0SUJA0	S/M MODE SWITCH ASSY	1		
5	CETN14A0	EDGE SADDLE FOR CABLE PROTECTION	1		
6	CETN13A0	CLAMP WITH SPONGE	1		
7	1A0HMYA0	LABEL FOR S/M MODE SWITCH	1		
8	CATN46CR	SWITCH BOX COVER (RAL9003)	1		
	1A0HVWA0	SWITCH BOX COVER (CN80)			
9	1E00VTA0	PAN HEAD SEMS SCREW M4x10 RAL9003	2		
	1A033FA0	PAN HEAD SCREW M4x10 CN80			
10	1A0SUHA0	TRUNK LINE FOR ADJUST PULSE	1		

SWITCH BOX (D249W-XN)

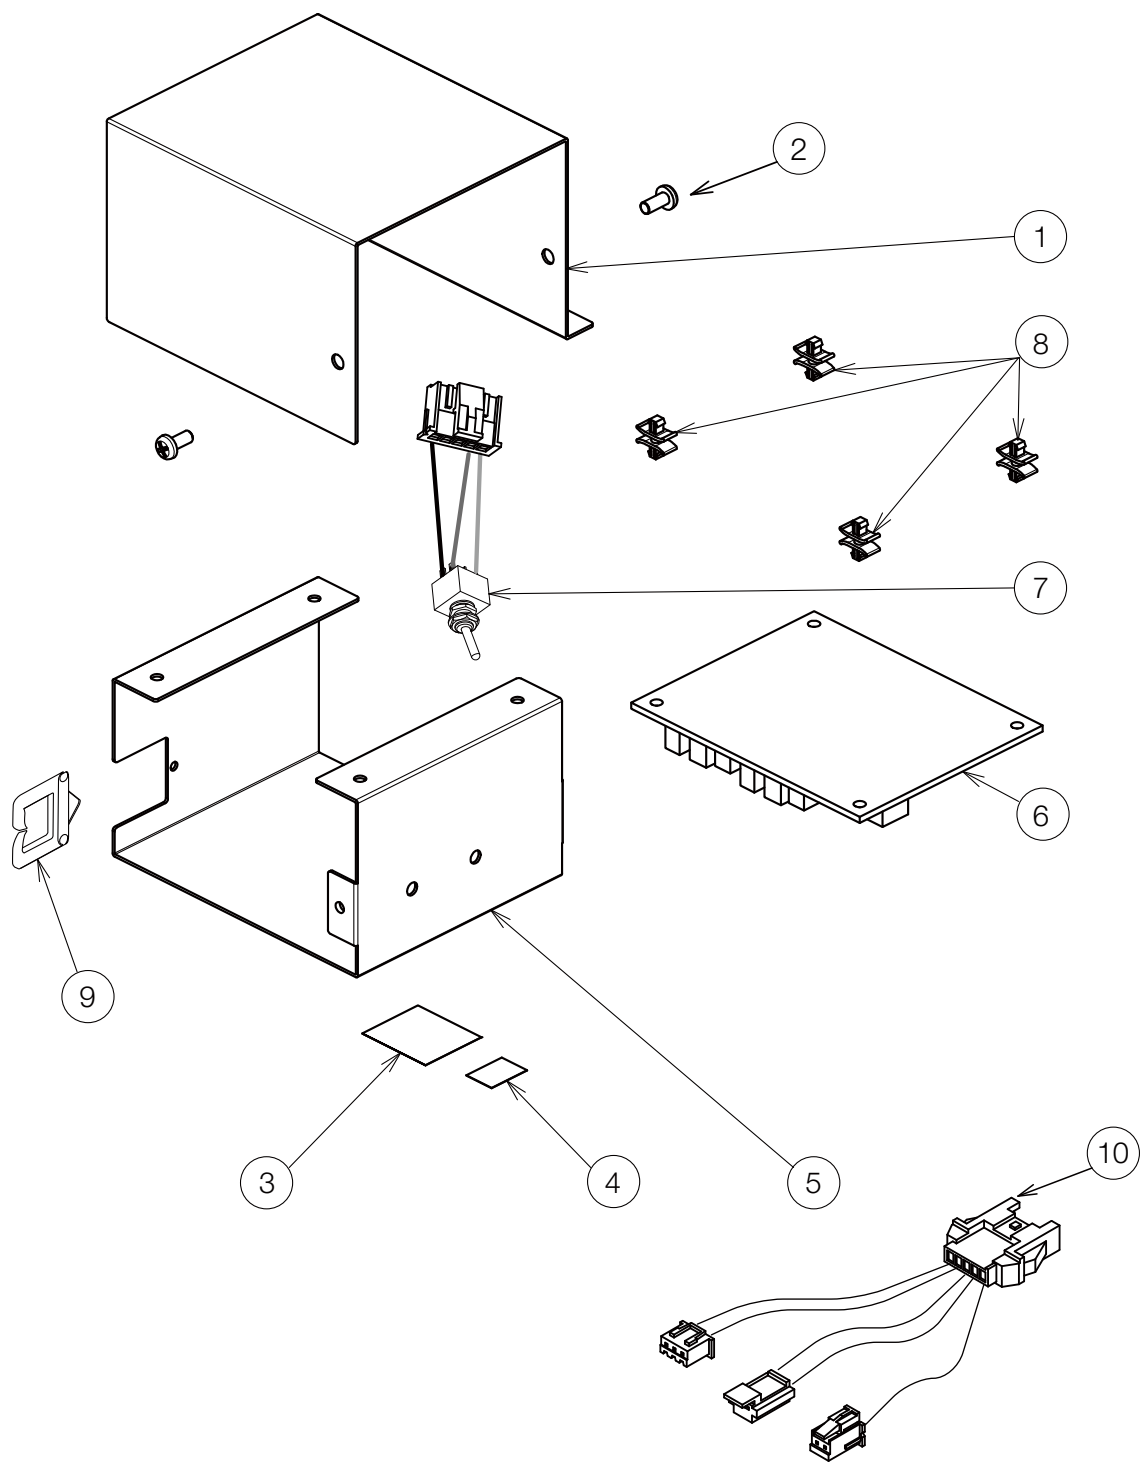


NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A0AFRA0	SWITCH BOX COVER	1		
2	ZA887LPU	PAN HEAD SEMS SCREW 2P M4x8 SUS	2		
3	CADR07A0	LABEL FOR S/M MODE SWITCH	1		
4	U-31860	LABEL FOR POWER SUPPLY	1		
5	1A0B6SA0	SWITCH BOX	1		
6	1G0803A0	LIGHT CONTROL PCB	1		
7	1A0SUJA0	S/M MODE SWITCH ASSY	1		
8	CERN39A0	DOUBLE LOCKING SPACER	4		
9	CETN14A0	EDGE SADDLE FOR CABLE PROTECTION	1		
10	1A0SUHA0	TRUNK LINE FOR ADJUST PULSE	1		

TROLLEY AND RAIL SECTION (D245)

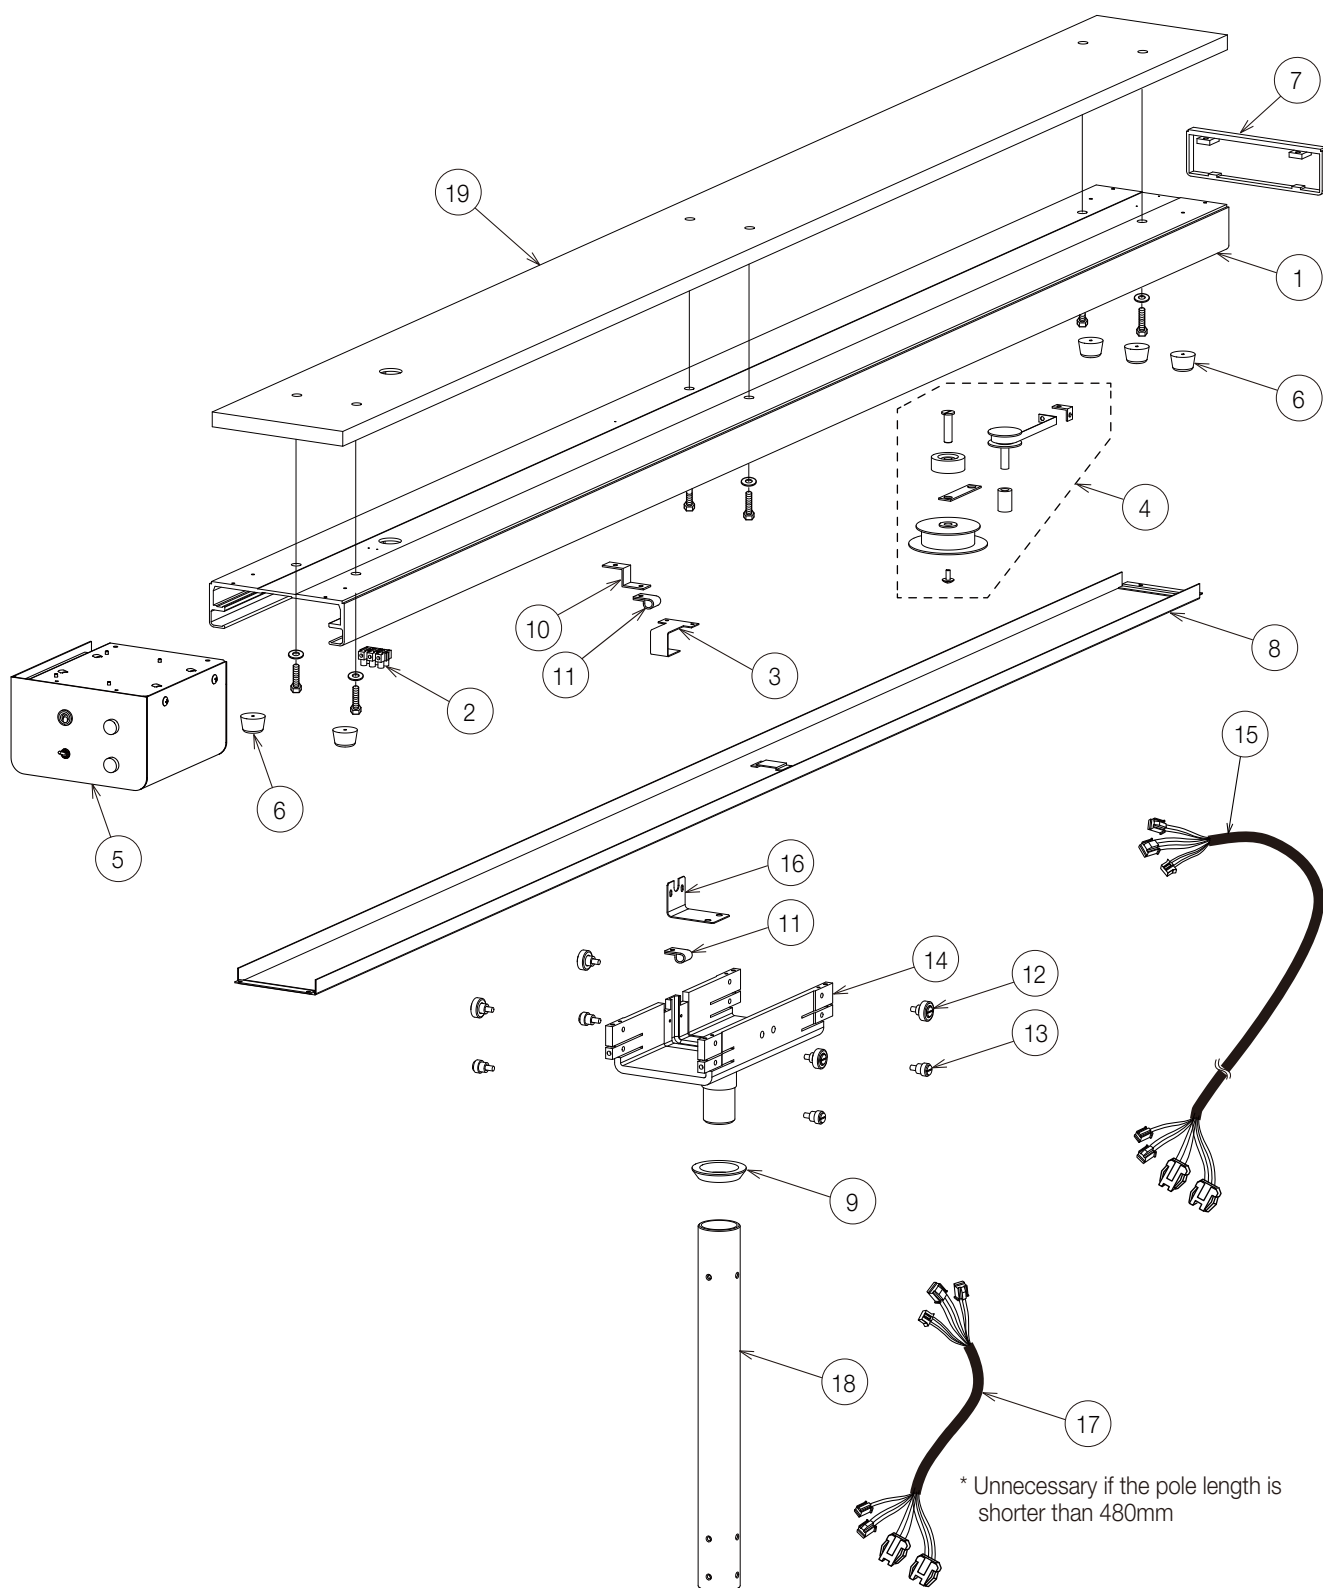



NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1A0824A0	RAIL (HAMMER NET COATED, CN-80)	1		
2	CAML90B0	CODE HOOK TERMINAL BLOCK	1		
3	CAMG90A0	CENTRE COVER HOOK	1		
4	1G0133A0	PULLEY ASSY	1		
5	1G09E8A0	TRANSFORMER ASSY FOR TRACK TYPE	1		
6	ABNL23A0	STOPPER	5		
7	1G02EEA0	END COVER ASSY (CN-80)	1		
8	1P03CYA0	CENTER COVER ASSY (CN-80)	1		
9	CAMG95A0	TROLLEY COLLAR (COATED)	1		
10	CAMV63A0	LEAD WIRE GUIDE	1		
11	CENZ15A0	NYLON CLAMP	2		
12	CGAN76A0	ROLLER UPPER ASSY	4		
13	CGAN77A0	ROLLER LOWER ASSY	4		
14	1A0823B0	TROLLEY (HAMMER NET COATED, CN-80)	1		
15	1A087RA0	YOKE RELAY CODE A	1		
16	CAMP73B0	LEAD WIRE COVER	1		
17	1A087TA0	YOKE RELAY CODE C	1		
18	1G02U2A0	T POLE SET 380L (CN-80)	1		
	1G02U3A0	T POLE SET 530L (CN-80)			
	1G02U4A0	T POLE SET 680L (CN-80)			
	1G02U5A0	T POLE SET 840L (CN-80)			
	1G02U6A0	T POLE SET 1000L (CN-80)			
19	CAMG94D0	PALLET	1		
-	1G009XA0	PALLET SCREW SET	1		
-	CGRN39B0	TRACK SCREW SET	1		


CEILING POLE SECTION (D242)

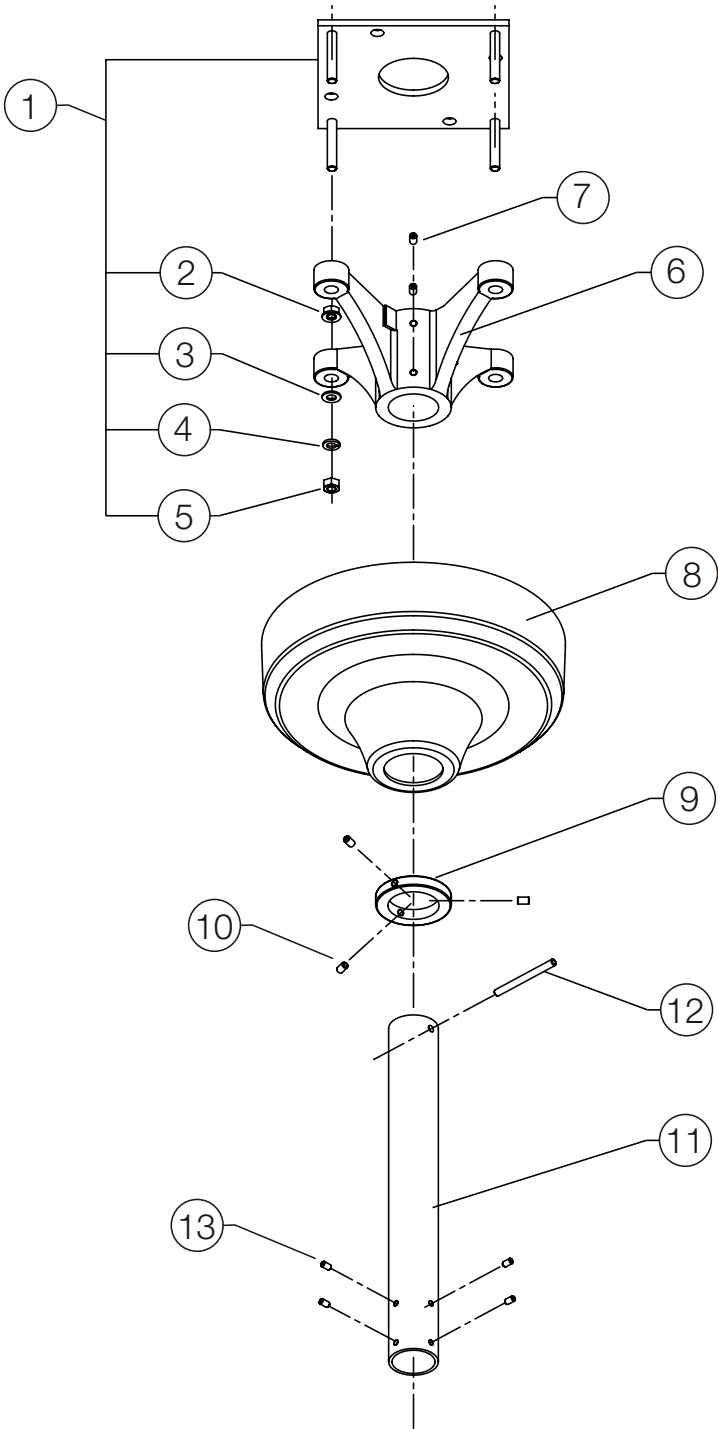



NO.	PARTS NO.	DESCRIPTION	QTY	APPLICABLE SERIAL NO.	NOTE
1	1P0211A0	MOUNTING PLATE WITH NUT (NO.2-5)	1		
2	ZA901PAY	FLANGE NUT M8 CHROME (LEVELING NUT)	4		
3	GENE00B0	WASHER M8X22X1.63 CHROME	4		
4	ZB511PAY	SPRING WASHER M8 CHROME	4		
5	1E00ABA0	U NUT M8 CHROME	4		
6	TCPA01A0	CEILING FLANGE	1		
7	ZA774OPU	HEX SOCKET SET SCREW M6X8 (CUP POINT) SUS	4		
8	1A0827A0	CEILING COVER (CN-80)	1		
9	CAMG76A0	STOPPER RING	1		
10	CENB35B0	HEX SOCKET SET SCREW M6X8 (CUP POINT) (RED MEC THREAD LOCK)	3		
11	1G02TLA0	CEILING POLE SET 340MM (CN-80)	1		
	1G02TMA0	CEILING POLE SET 510MM (CN-80)			
	1G02TNA0	CEILING POLE SET 680MM (CN-80)			
	1G02TPA0	CEILING POLE SET 840MM (CN-80)			
	1G02TQA0	CEILING POLE SET 1000MM (CN-80)			
12	CAMK40A0	ROLL PIN 6X70	1		
13	ZA772NRY	HEX SOCKET SET SCREW M5X10 (TRUNCATED CONE POINT) CHROME	4		
-	CGRN38B0	CEILING SCREW SET	1		
-	CGQO13A0	CEILING FLANGE SET (ID NO, 1-7 AND 12)	1		

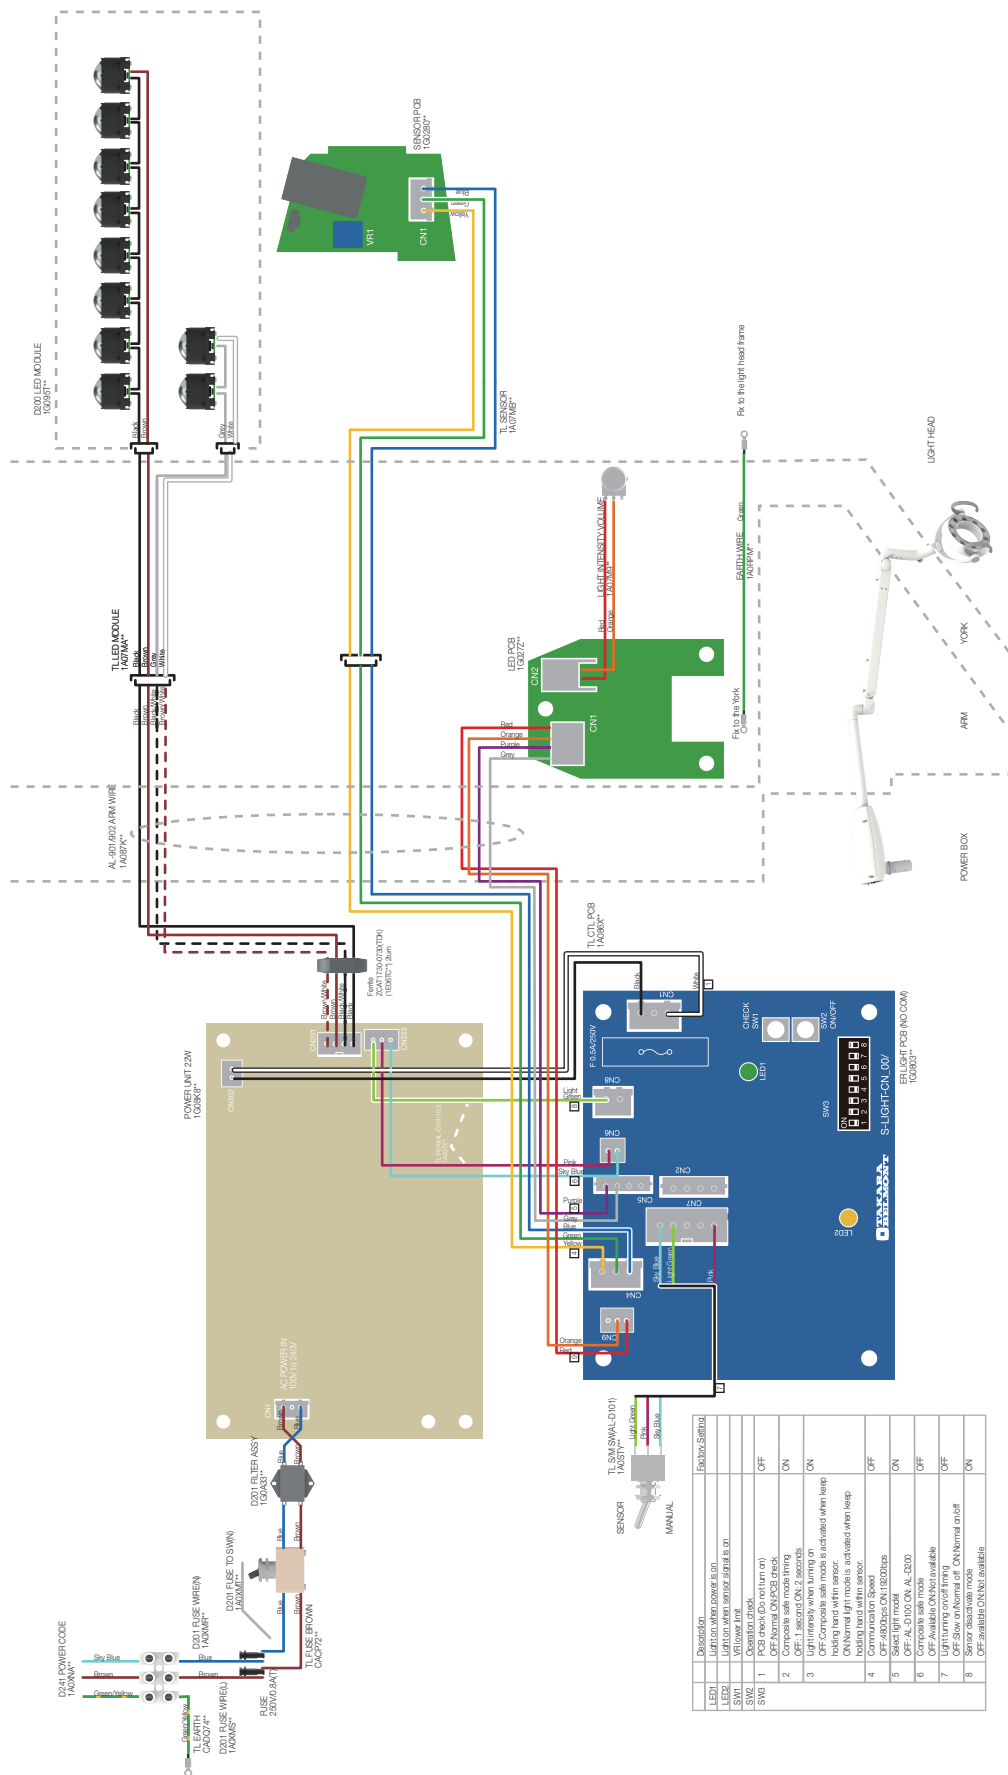

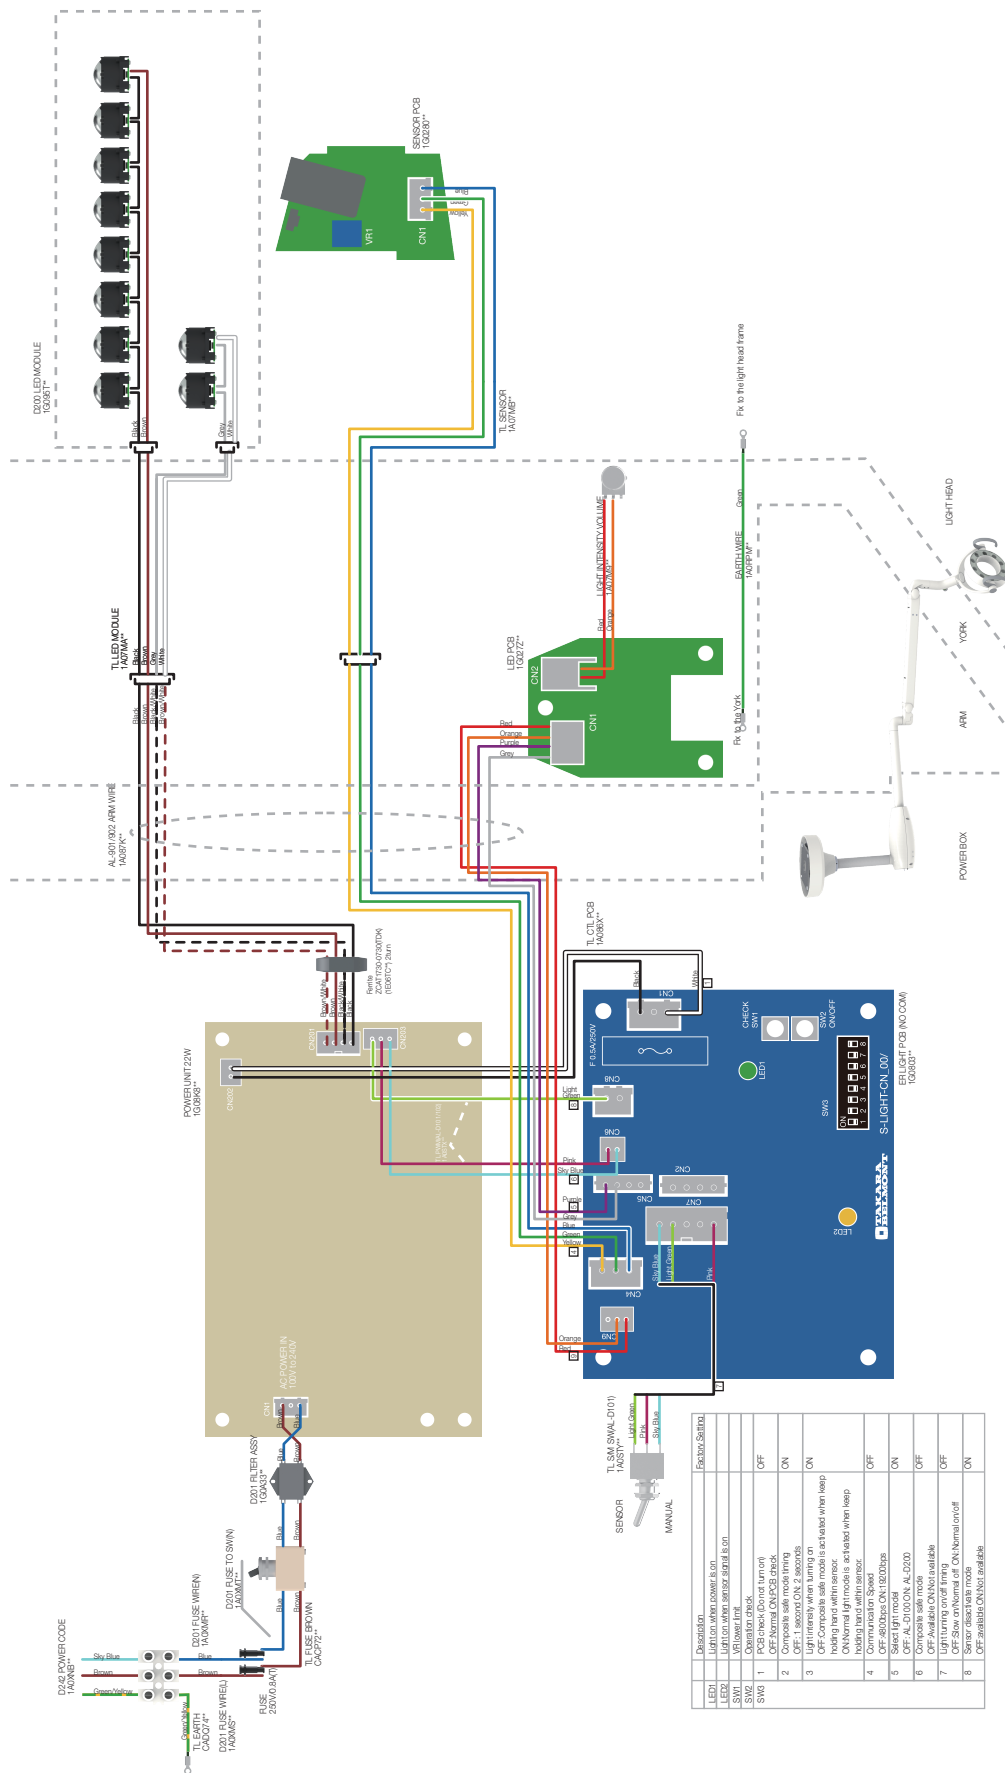


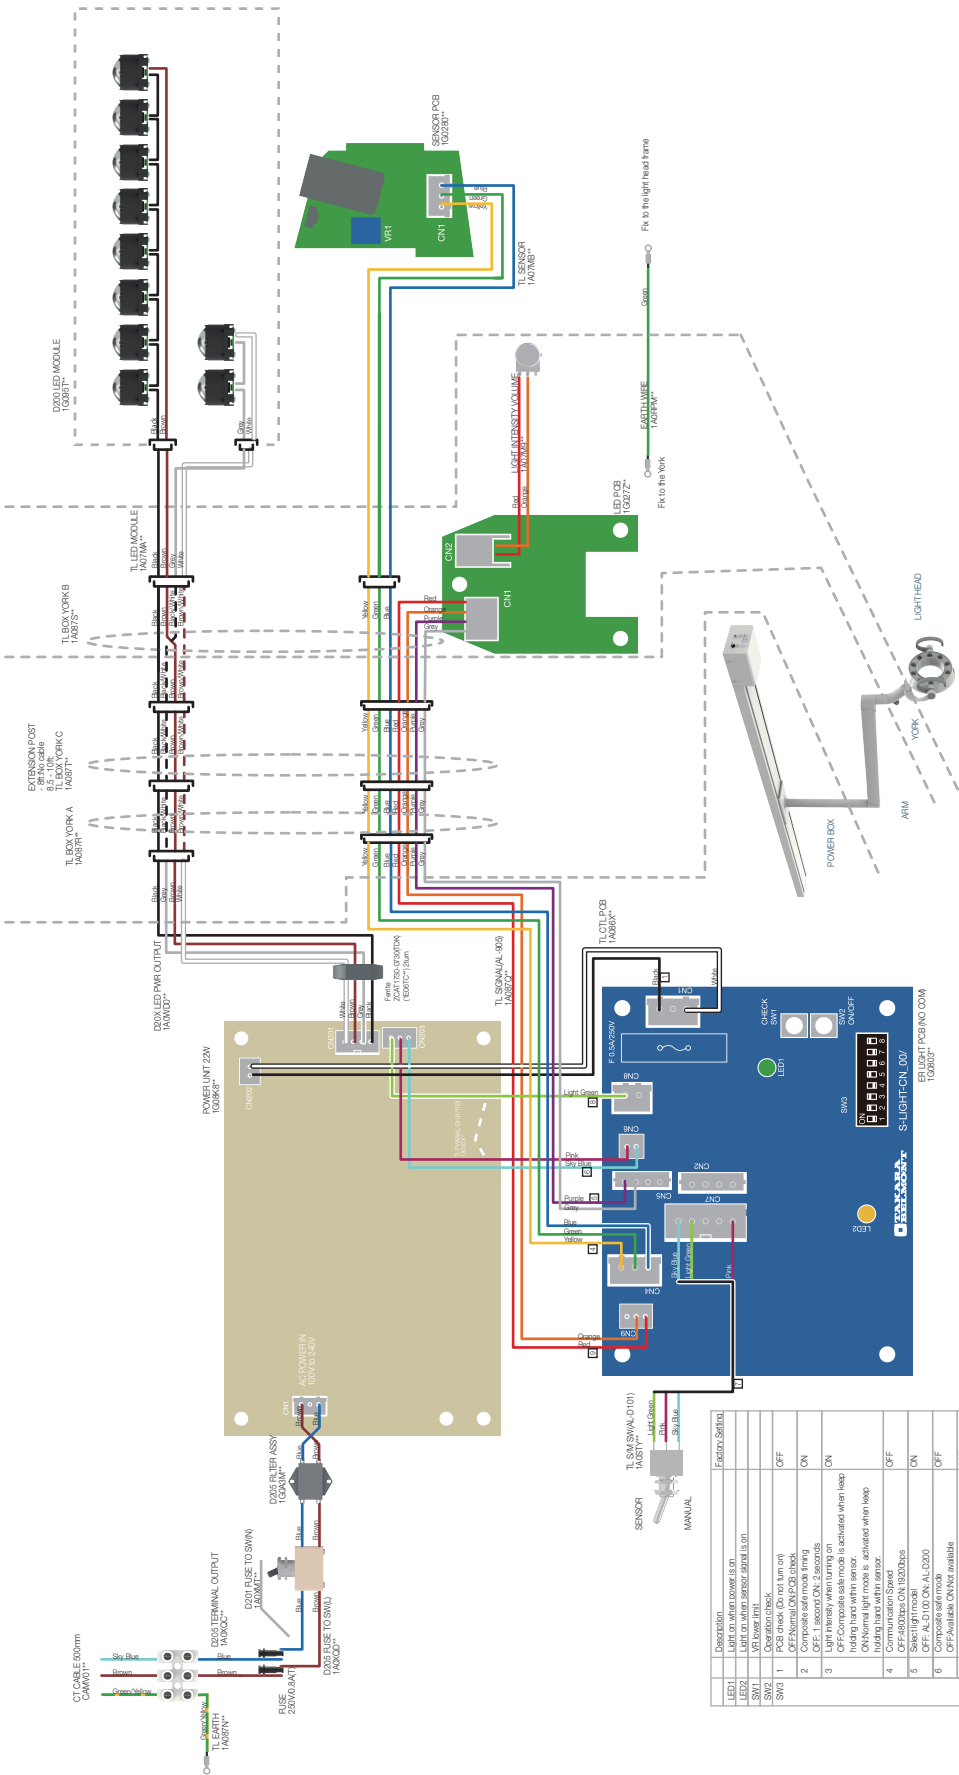


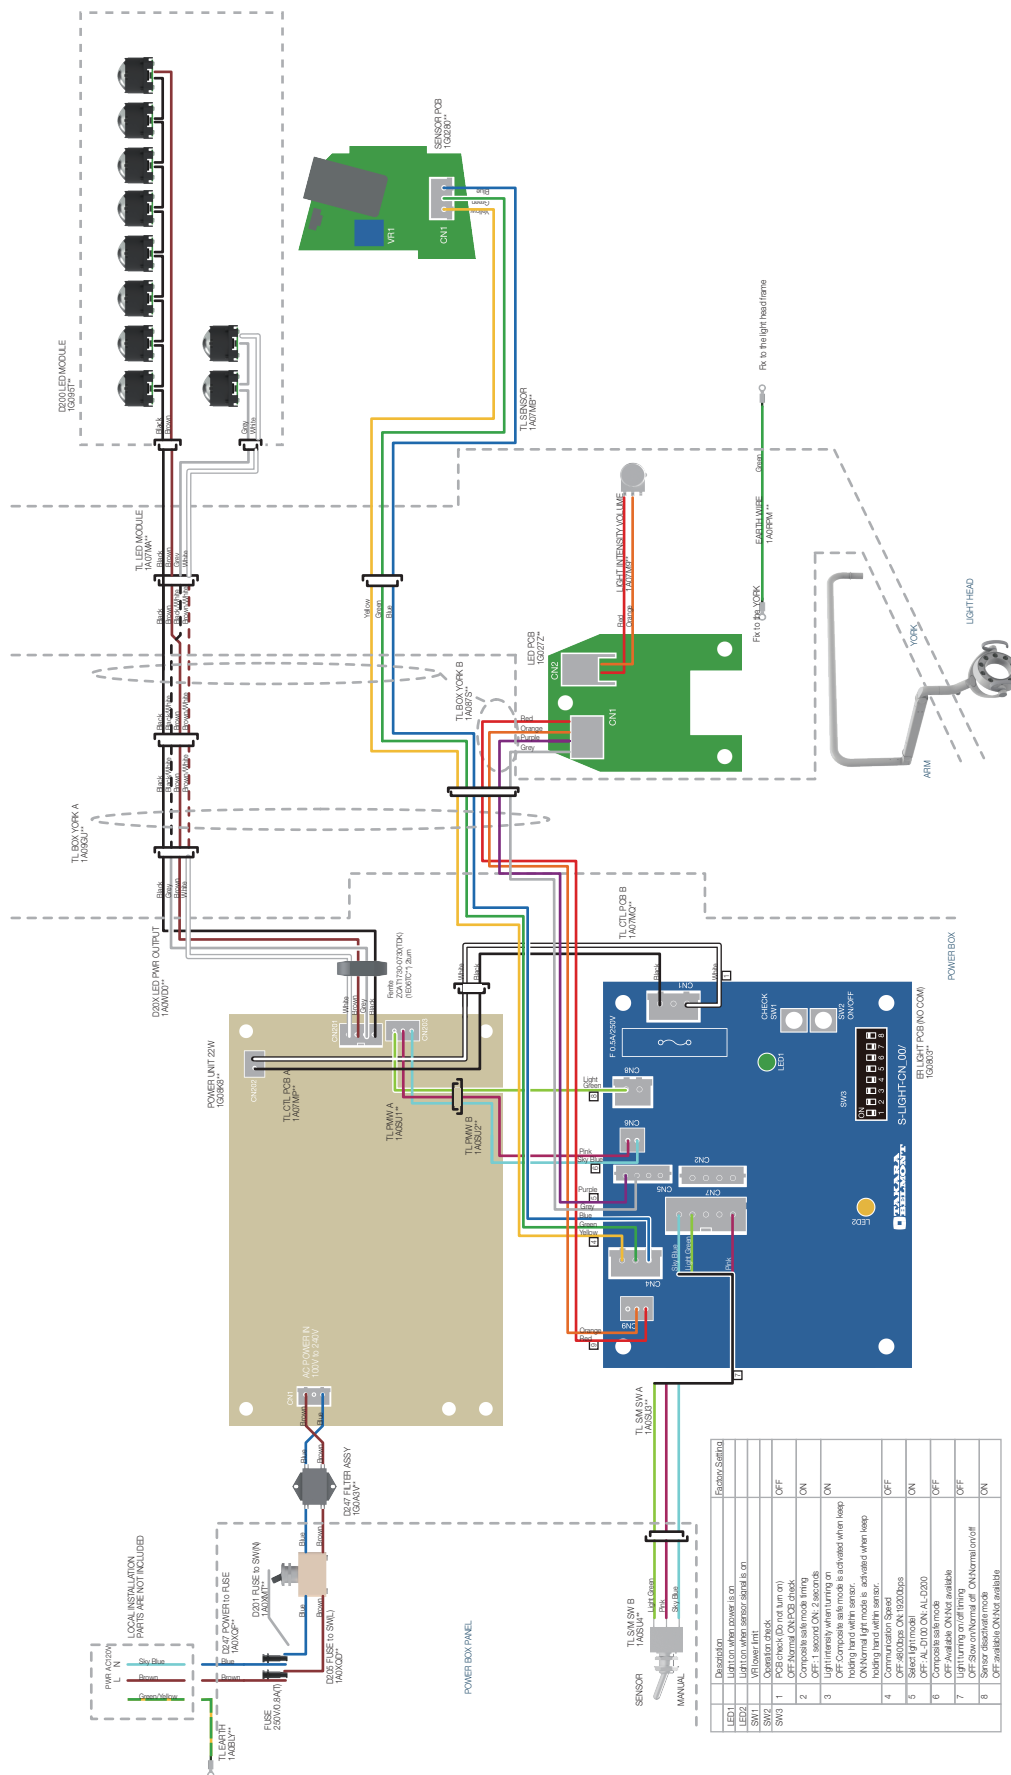

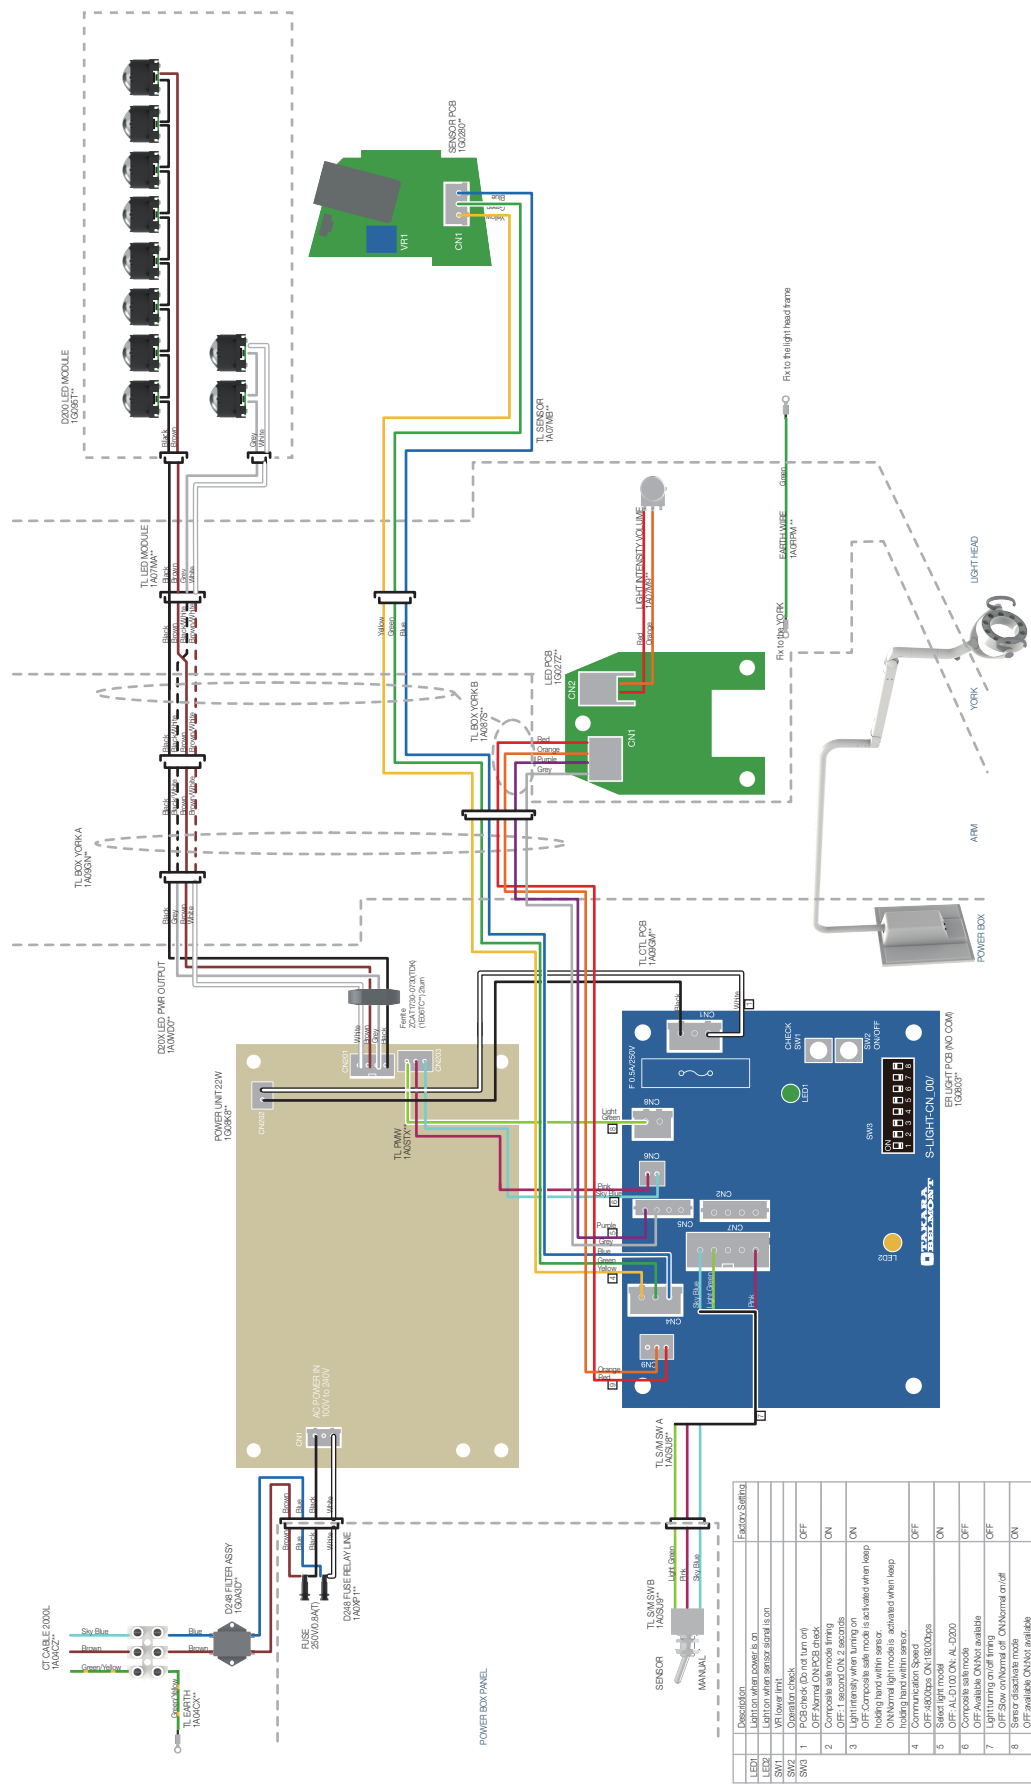

Description		Factor Setting
LED1	Light on when power is on	
LED2	Light on when sensor signal is on	
SW1	Light on when power is on	
SW2	Light on when sensor signal is on	
SW3	Light on when power is on	
1	OFF Normal ON/PCB disk	OFF
2	Composite with mode timing	ON
3	OFF 1.1 second ON/2.1 second OFF Composite with mode timing	ON
4	ON Normal light mode is activated when keep holding hand sensor	ON
5	ON Normal light mode is activated when keep holding hand sensor	ON
6	OFF 4800bps ON/18200bps	OFF
7	Selected light mode	ON
8	OFF AL010 ON AL C200	OFF
9	OFF Available ON/Not available	OFF
10	Light turning on/off timing	OFF
11	OFF Slow on/normal of ON/Normal on/off	ON
12	Slow on/normal of ON/Normal on/off	ON
13	Slow on/normal of ON/Normal on/off	ON
14	Slow on/normal of ON/Normal on/off	ON
15	Slow on/normal of ON/Normal on/off	ON
16	Slow on/normal of ON/Normal on/off	ON
17	Slow on/normal of ON/Normal on/off	ON
18	Slow on/normal of ON/Normal on/off	ON
19	Slow on/normal of ON/Normal on/off	ON
20	Slow on/normal of ON/Normal on/off	ON
21	Slow on/normal of ON/Normal on/off	ON
22	Slow on/normal of ON/Normal on/off	ON
23	Slow on/normal of ON/Normal on/off	ON
24	Slow on/normal of ON/Normal on/off	ON
25	Slow on/normal of ON/Normal on/off	ON
26	Slow on/normal of ON/Normal on/off	ON
27	Slow on/normal of ON/Normal on/off	ON
28	Slow on/normal of ON/Normal on/off	ON
29	Slow on/normal of ON/Normal on/off	ON
30	Slow on/normal of ON/Normal on/off	ON
31	Slow on/normal of ON/Normal on/off	ON
32	Slow on/normal of ON/Normal on/off	ON
33	Slow on/normal of ON/Normal on/off	ON
34	Slow on/normal of ON/Normal on/off	ON
35	Slow on/normal of ON/Normal on/off	ON
36	Slow on/normal of ON/Normal on/off	ON
37	Slow on/normal of ON/Normal on/off	ON
38	Slow on/normal of ON/Normal on/off	ON
39	Slow on/normal of ON/Normal on/off	ON
40	Slow on/normal of ON/Normal on/off	ON
41	Slow on/normal of ON/Normal on/off	ON
42	Slow on/normal of ON/Normal on/off	ON
43	Slow on/normal of ON/Normal on/off	ON
44	Slow on/normal of ON/Normal on/off	ON
45	Slow on/normal of ON/Normal on/off	ON
46	Slow on/normal of ON/Normal on/off	ON
47	Slow on/normal of ON/Normal on/off	ON
48	Slow on/normal of ON/Normal on/off	ON
49	Slow on/normal of ON/Normal on/off	ON
50	Slow on/normal of ON/Normal on/off	ON
51	Slow on/normal of ON/Normal on/off	ON
52	Slow on/normal of ON/Normal on/off	ON
53	Slow on/normal of ON/Normal on/off	ON
54	Slow on/normal of ON/Normal on/off	ON
55	Slow on/normal of ON/Normal on/off	ON
56	Slow on/normal of ON/Normal on/off	ON
57	Slow on/normal of ON/Normal on/off	ON
58	Slow on/normal of ON/Normal on/off	ON
59	Slow on/normal of ON/Normal on/off	ON
60	Slow on/normal of ON/Normal on/off	ON
61	Slow on/normal of ON/Normal on/off	ON
62	Slow on/normal of ON/Normal on/off	ON
63	Slow on/normal of ON/Normal on/off	ON
64	Slow on/normal of ON/Normal on/off	ON
65	Slow on/normal of ON/Normal on/off	ON
66	Slow on/normal of ON/Normal on/off	ON
67	Slow on/normal of ON/Normal on/off	ON
68	Slow on/normal of ON/Normal on/off	ON
69	Slow on/normal of ON/Normal on/off	ON
70	Slow on/normal of ON/Normal on/off	ON
71	Slow on/normal of ON/Normal on/off	ON
72	Slow on/normal of ON/Normal on/off	ON
73	Slow on/normal of ON/Normal on/off	ON
74	Slow on/normal of ON/Normal on/off	ON
75	Slow on/normal of ON/Normal on/off	ON
76	Slow on/normal of ON/Normal on/off	ON
77	Slow on/normal of ON/Normal on/off	ON
78	Slow on/normal of ON/Normal on/off	ON
79	Slow on/normal of ON/Normal on/off	ON
80	Slow on/normal of ON/Normal on/off	ON
81	Slow on/normal of ON/Normal on/off	ON
82	Slow on/normal of ON/Normal on/off	ON
83	Slow on/normal of ON/Normal on/off	ON
84	Slow on/normal of ON/Normal on/off	ON
85	Slow on/normal of ON/Normal on/off	ON
86	Slow on/normal of ON/Normal on/off	ON
87	Slow on/normal of ON/Normal on/off	ON
88	Slow on/normal of ON/Normal on/off	ON
89	Slow on/normal of ON/Normal on/off	ON
90	Slow on/normal of ON/Normal on/off	ON
91	Slow on/normal of ON/Normal on/off	ON
92	Slow on/normal of ON/Normal on/off	ON
93	Slow on/normal of ON/Normal on/off	ON
94	Slow on/normal of ON/Normal on/off	ON
95	Slow on/normal of ON/Normal on/off	ON
96	Slow on/normal of ON/Normal on/off	ON
97	Slow on/normal of ON/Normal on/off	ON
98	Slow on/normal of ON/Normal on/off	ON
99	Slow on/normal of ON/Normal on/off	ON
100	Slow on/normal of ON/Normal on/off	ON

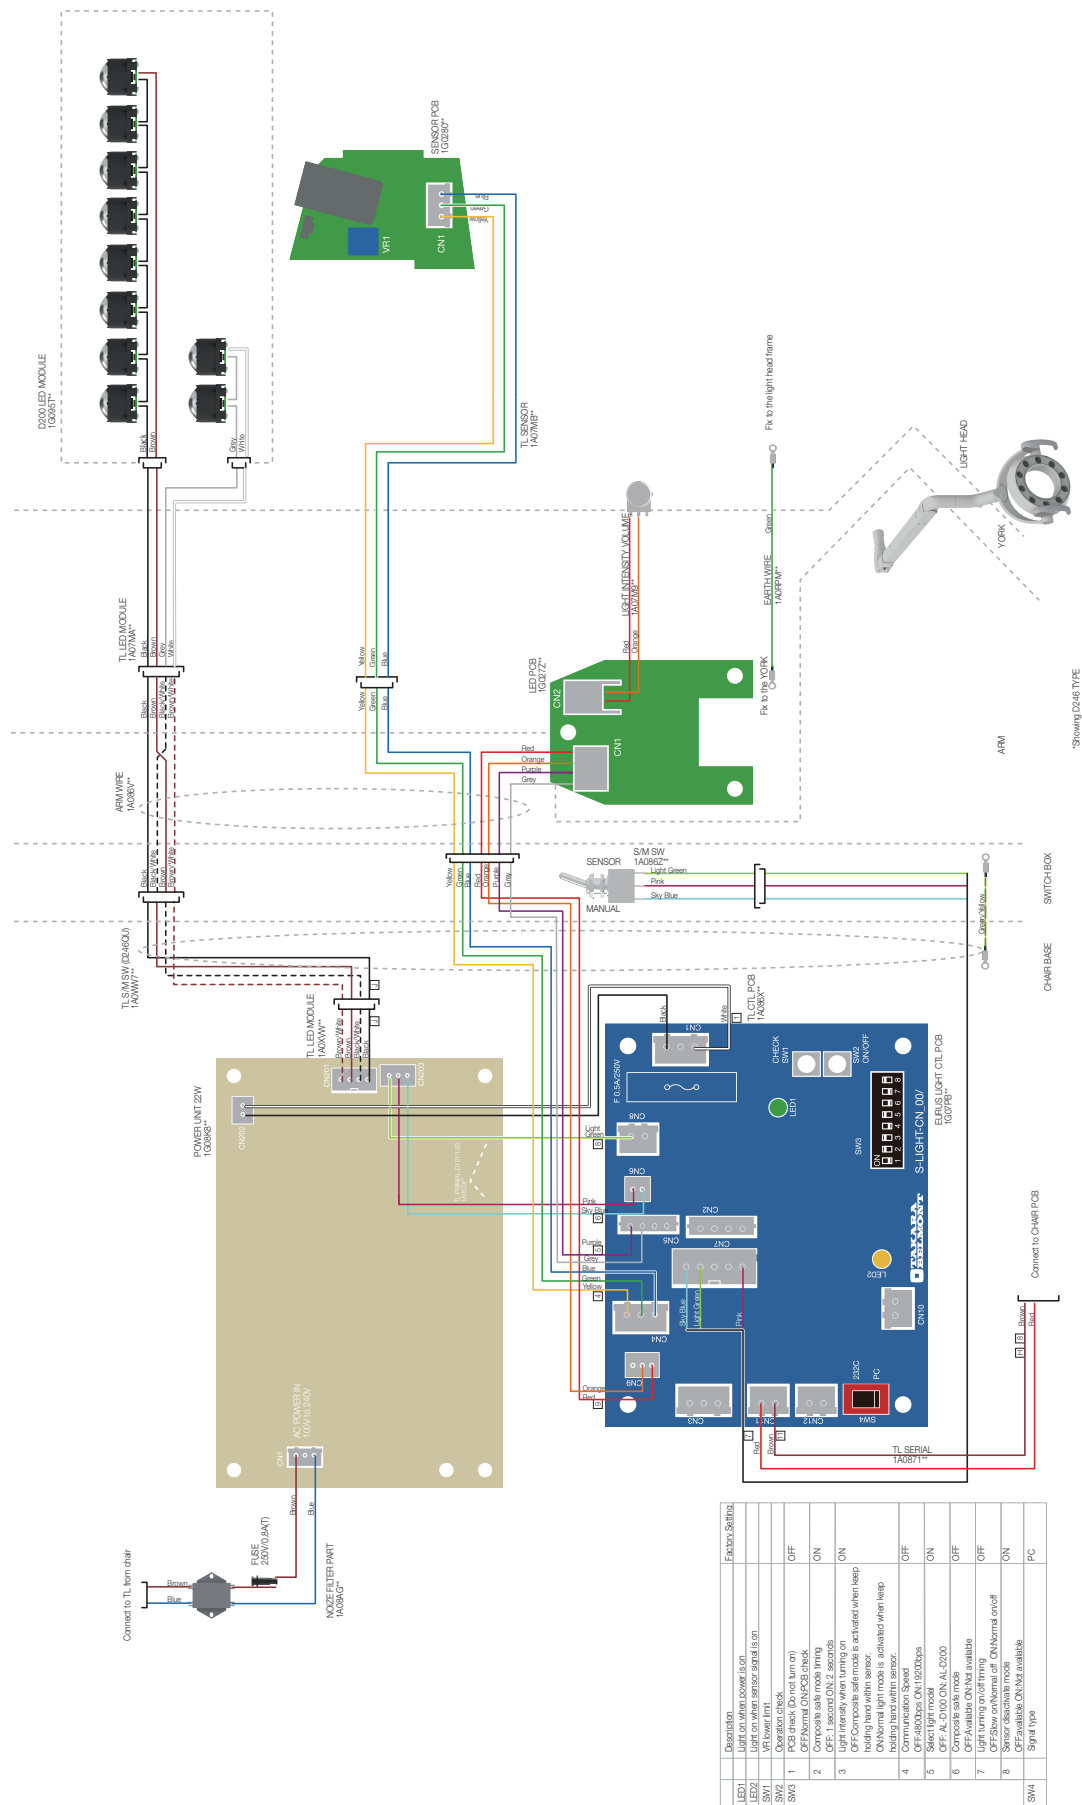

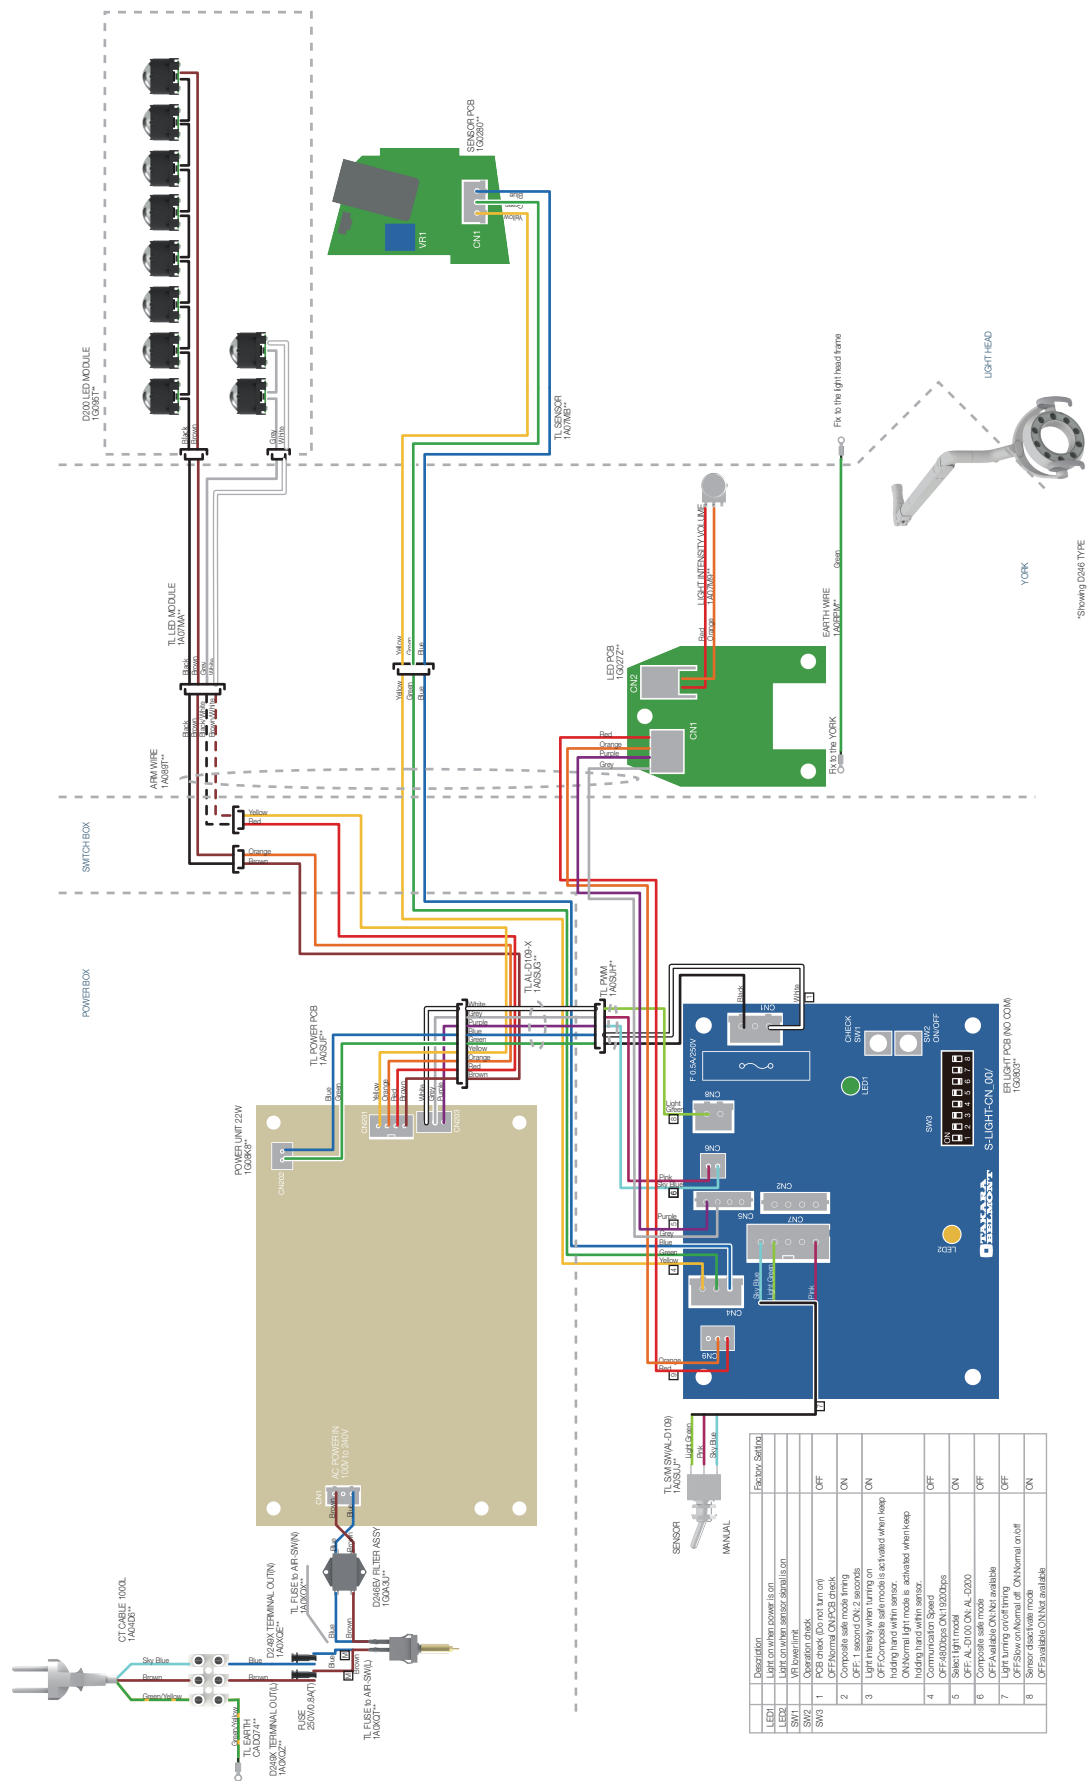

REVISION RECORD

DATE		CONTENT
22-Sep-22	1st	Publish



Importer in U.S.A.
BELMONT EQUIPMENT,
Division of Takara Belmont USA, Inc
101 Belmont Drive, Somerset, New Jersey 08873 U.S.A.
TEL : (732) 469-5000 / (800) 223-1192
FAX : (732) 356-1035

Importer in Canada
TAKARA COMPANY, CANADA, LTD.
2455 Meadowvale Blvd. Mississauga, Ontario L5N 5S2, Canada
TEL : (905) 816-8965
www.belmont.ca

TAKARA BELMONT CORPORATION



2-1-1, Higashishinsaibashi, Chuo-ku, Osaka, 542-0083, Japan
TEL : +81-6-6213-5945
FAX : +81-6-6212-3680