


Installation Instructions & Owners Manual

E-Series Dental Cabinetry Model: E-3 (All Models)



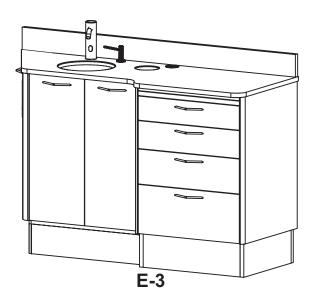

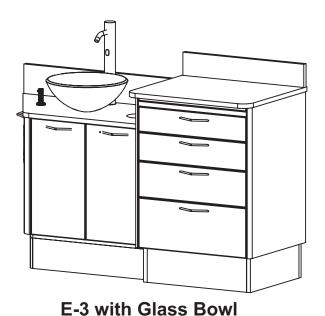

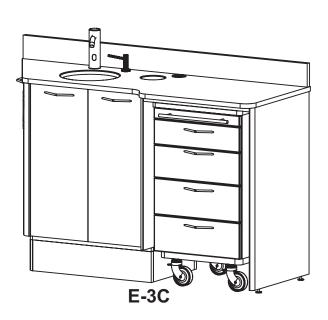


E-3C with Glass Bowl

Consumer: Please retain these instructions for future use.



1631 Dr. Martin Luther King Drive St. Louis, MO 63106 (314) 231-7383 (888) 833-3682 Fax (314) 621-2296 www.belmontequip.com

Version: 03272013

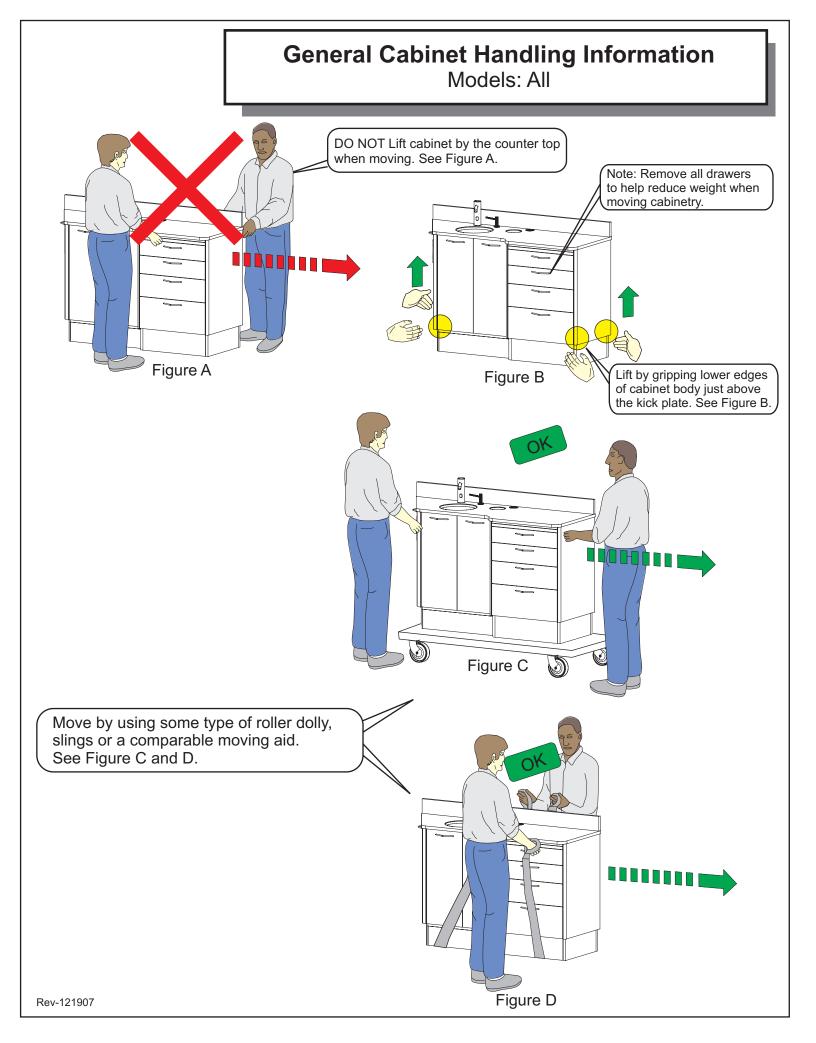

Handling Information: Cambria Back Splash

Models: E-1 / E-3 (All Models)


Figure A



DO NOT handle the Cambria back splash with the wide edge parallel with the floor. See Figure A.


Figure B

Handle the Cambria back splash with the wide edge perpendicular with the floor. See Figure B.

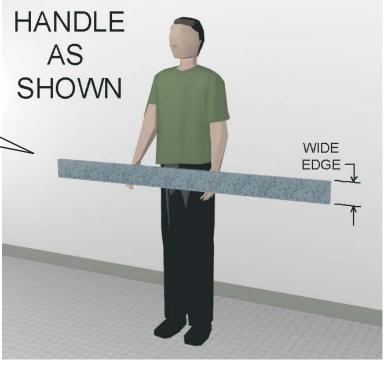



<u>Note:</u> To avoid damage to the Cambria back splash make sure you handle with care to avoid cracking of the Cambria material. Cambria is very hard but can crack if exposed to too much stress or sudden impact.

Detail Drawings Model: E-3

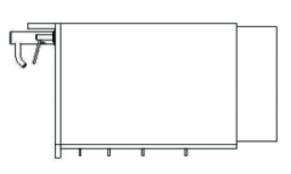





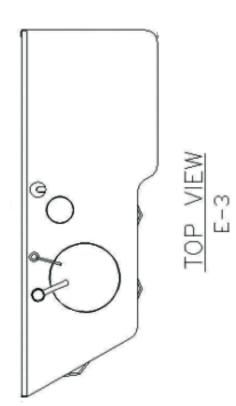


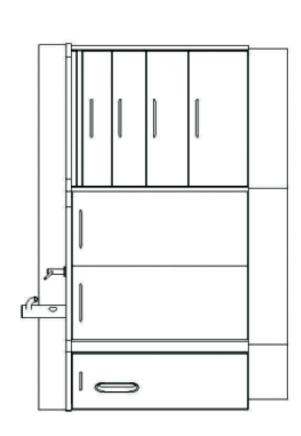


Detail DrawingsModel: E-3 w/ Glass Bowl

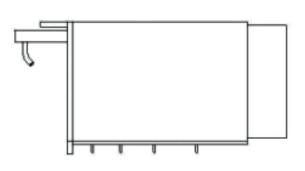

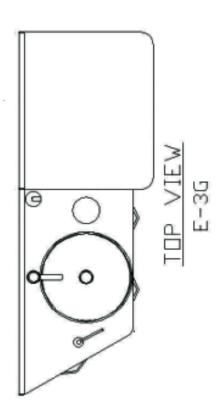


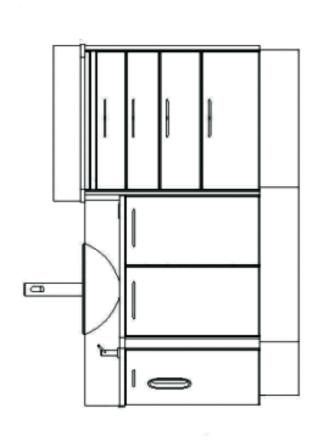


Detail DrawingsModel: E-3C

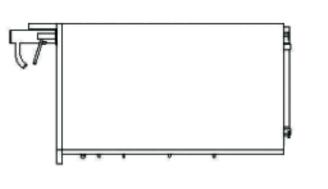




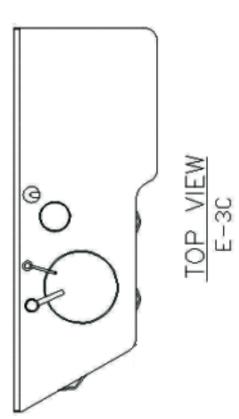

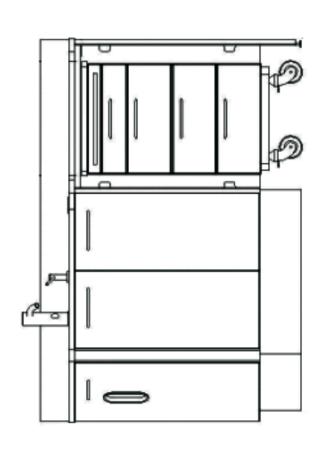



FRONT VIEW E-3C

Detail Drawings Model: E-3C w/ Glass Bowl

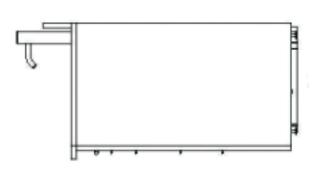



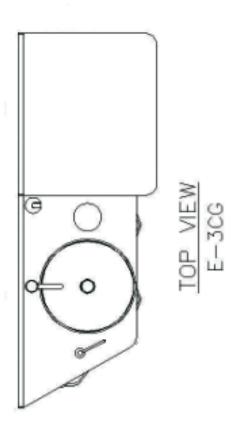


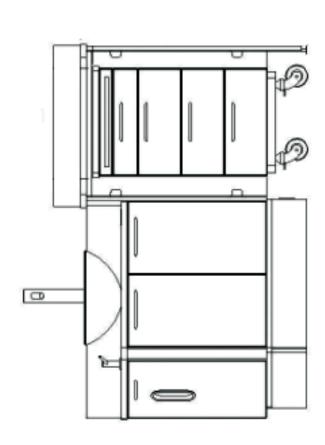


FRONT VIEW
E-3CG


Detail DrawingsModel: E-3CM

RIGHT SIDE VIEW E-3CM



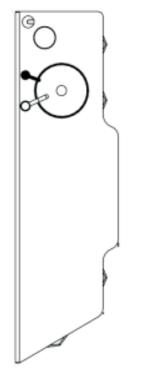

TOP VIEW E-3CM

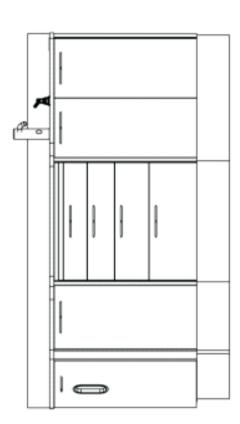



FRONT VIEW
E-3CM

Detail Drawings Model: E-3CM w/ Glass Bowl


RIGHT SIDE VIEW E-3CMG





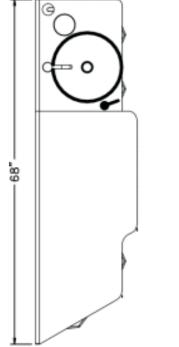





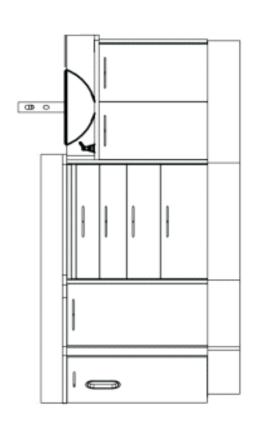


Detail Drawings Model: E-3CMC

RIGHT SIDE VIEW E-3CMC

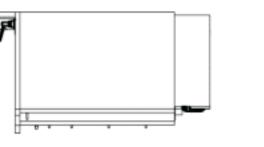

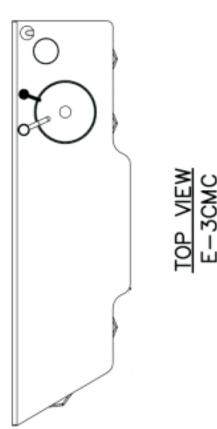


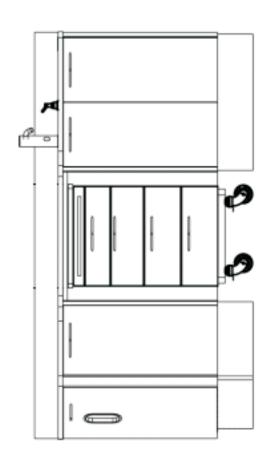


FRONT VIEW
E-3CMC


Detail DrawingsModel: E-3CMC w/ Glass Bowl

RIGHT SIDE VIEW E-3CMCG



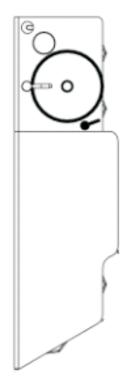




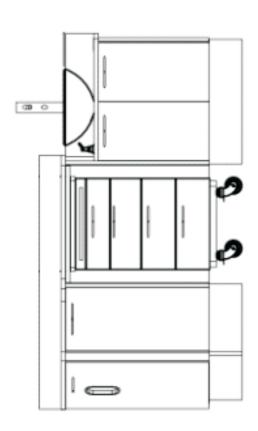

FRONT VIEW
E-3CMCG

Note: Test fit pieces prior to glueing into place


Back Splash Mounting Model: E-3 (All Models)

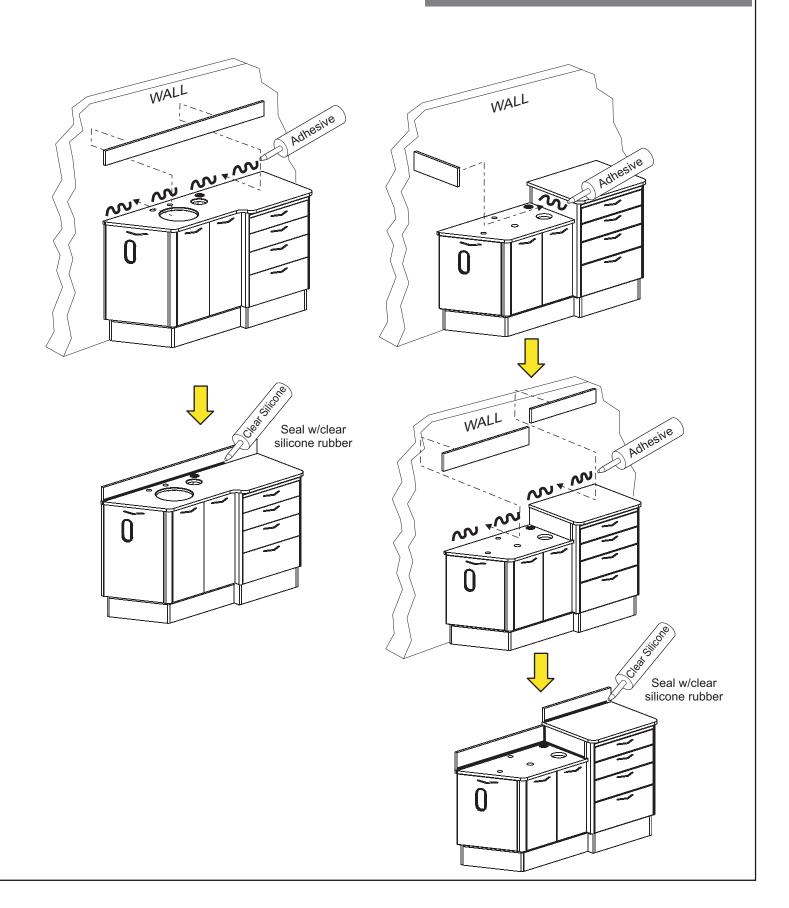

Glass Bowl Installation All Models w/ Glass Bowl

Step 1

Place Mounting Ring (A), Large Rubber Washer (B), Glass Bowl (C) aligned over the hole in the counter top. Insert the Drain Assembly (E) with the Small Rubber Washer (D) through the hole in the Glass Bowl. (see Figure 1).

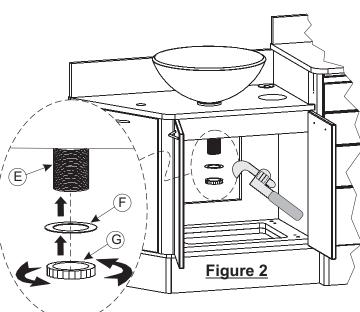

Step 2

(E

Connect Drain Assembly Nut (G) to Drain Assembly (E) along with the Small Plastic Washer (F) and hand tighten to check for alignment then use pipe wrench to complete tightening (see Figure 2).


Figure 1

CAUTION: DO NOT OVERTIGHTEN

Step 3

Connect Tail Piece (H) to Drain Assembly (E) and tighten using pipe wrench (see Figure 3). It may be necessary to cut off some of the Tail Piece to properly fit with remaining plumbing drain connections.


Make remaining plumbing drain connections per local codes and plumbing rough-ins.

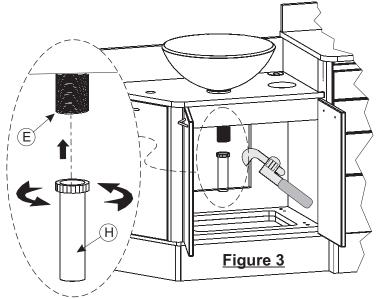



Hinge Adjustments

Model: E-3 (All Models)


Hinge Adjustment For Standard Doors

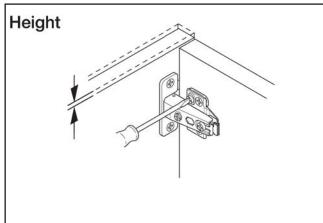

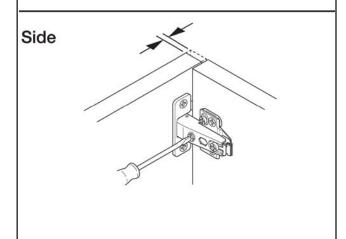


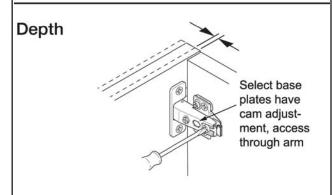

Hinge Adjustment For Angled Doors

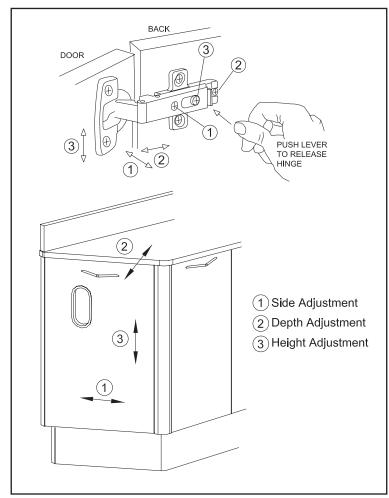

G-Force™ Controlled Closing Device

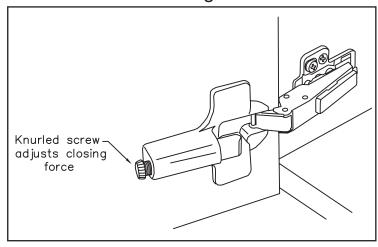



Drawer Assembly/Removal/Adjustments

Model: E-3 (All Models)


Drawer insertion and removal








Drawer front attachment and removal












Drawer assembly












Side adjustment






Cam height adjustment



Electrical Schematic

Model: E-3 (All Models)

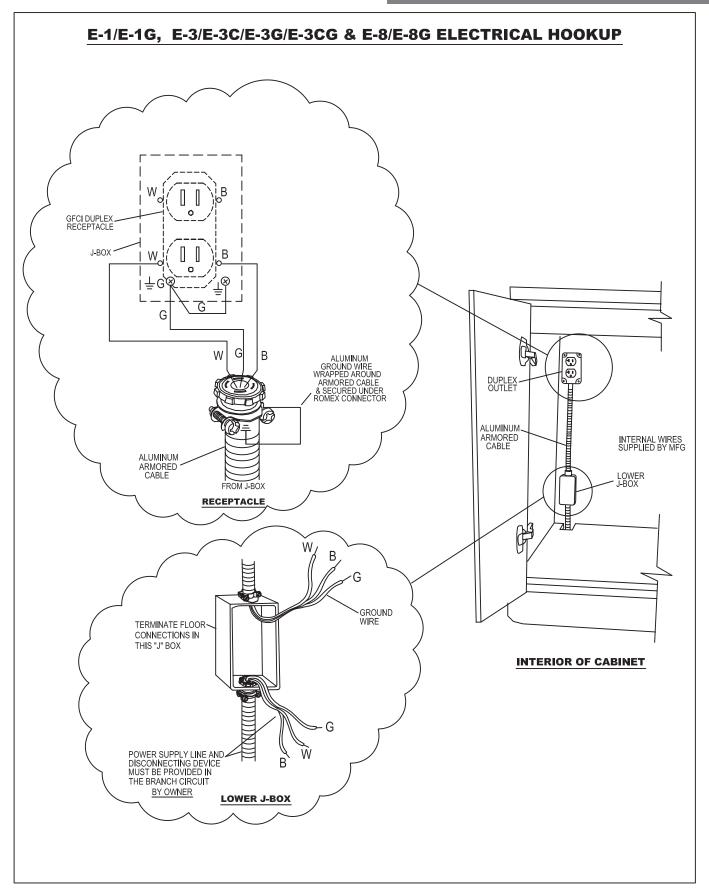

Electrical Specifications

Model: E-3 (All Models)

E-3 / E-3G / E-3C / E-3CG Electrical Specifications


IMPORTANT NOTE: Approved electrical components and designs are used in the cabinet; however, the procedures described herein must be performed by a licensed electrician using approved methods and materials according to the local code governing the installation site.


General Electrical Notes


- •Each cabinet should be wired to a **SEPARATE 15 Amp circuit**.
- •Unless otherwise specified, ALL WIRING supplied by the contractor must be APPROVED 12 Ga. AWG.
- •Type B equipment providing a particular degree of protection against electric shock, particularly regarding: allowable leakage current, & reliability of the protective earth connection (if present).
- •Disconnect device must be provided in the branch circuit by electrician.

Wall Template Model: E-3 (All Models)

WALL TEMPLATE REAR PLUMBING






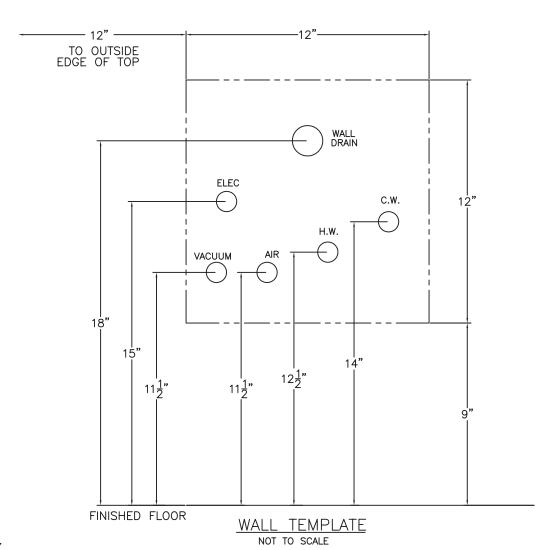



Rev-100207


Floor Template Plumbing Details Model: E-3 (All Models)

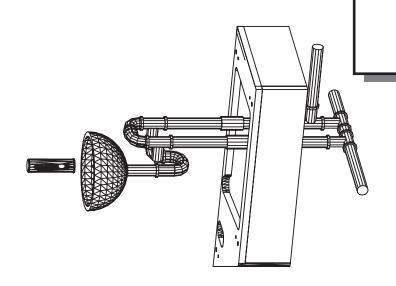


LOOP VENTING (E-3 & E-3C ONLY) IF LOOP VENTING IS REQUIRED AT INSTALLATION SITE SEE THESE DIAGRAMS.




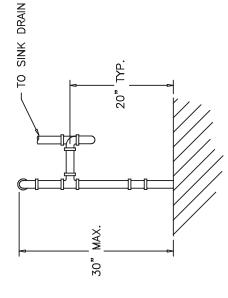


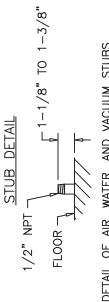


DETAIL OF AIR, WATER, AND VACUUM STUBS (STOP VALVES SUPPLIED WITH CABINET) IT IS THE RESPONSIBILITY OF THE INSTALLER TO CONFIRM THAT THE INSTALLATION MEETS LOCAL CODE WITH REGARD TO MATERIALS, VENTING, ETC. 1-1/2" DRAIN SHOWN: SIZE MAY VARY ACCORDING TO LOCAL CODE. PLUMBING NOTES

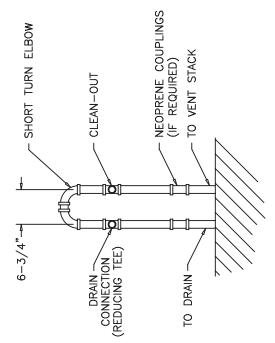

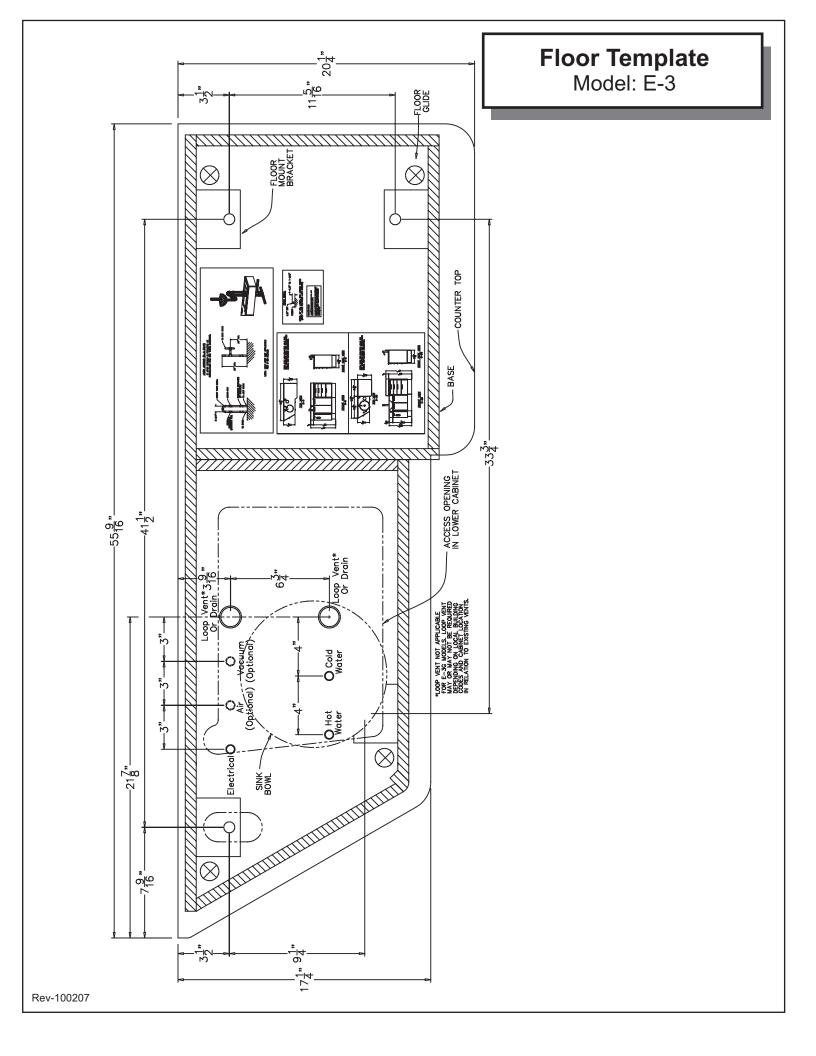


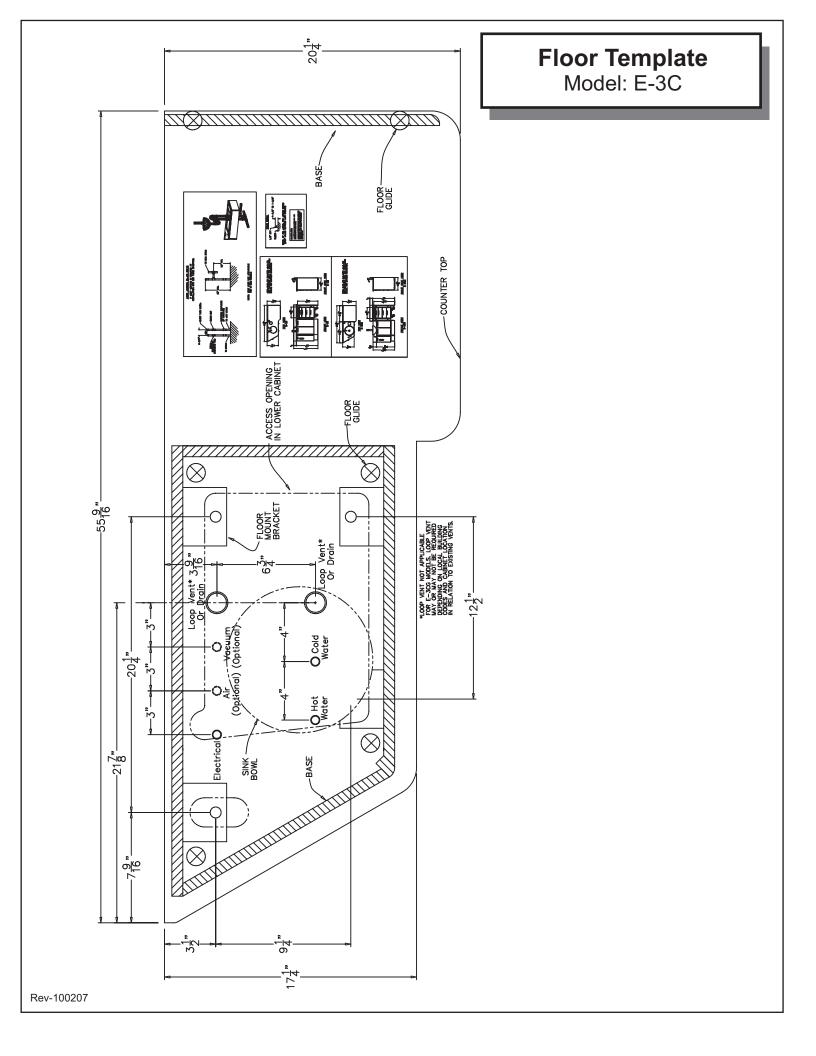

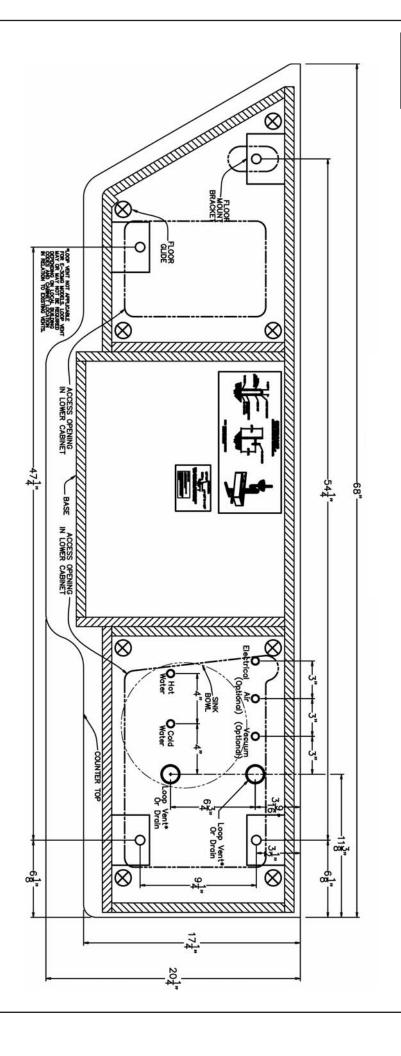

Floor Template

Model: E-3CM

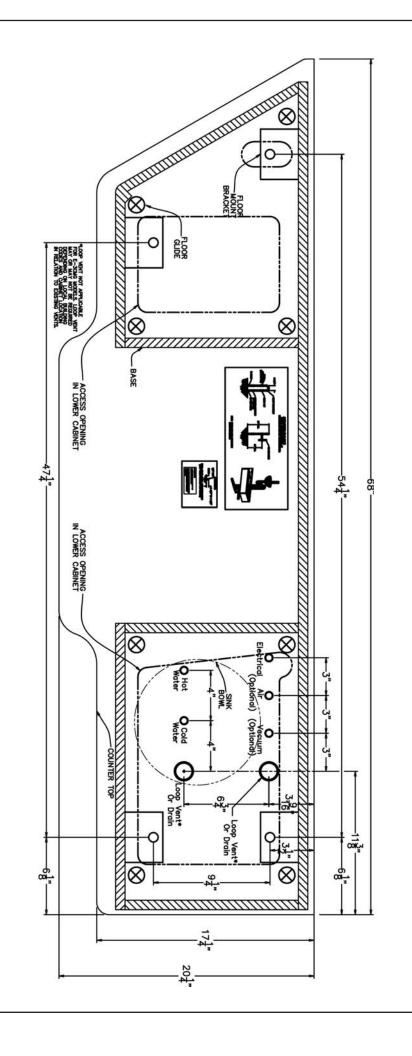

Floor Template

Model: E-3CMC

Surface Cleaning

Ortho-Sys. ECO-Sys, D-Series, & E-Series

Belmont Recommends:

- Countertop Magic® for Laminate and Solid Surface Work Surfaces
- Stone Clean and Polish Magic® for Cambria Quartz Work Surfaces
- Cabinet and Wood Magic® for Laminate and Melamine Surfaces
- Stainless Steel Magic® for Stainless Steel Surfaces

Products available at Lowes®, Home Depot®, or @ www.magicamerican.com

Laminate/Melamine Surfaces

Clean surfaces with a damp cloth or sponge with a mild soap.

Stains may be removed with most non-abrasive household cleaners such as Formula 409®, Fantastik®, Glass Plus®, or Windex with Ammonia D®.

For tough stains, use a paste of baking soda and water and apply with a soft bristled brush. Although baking soda is a low abrasive, excessive scrubbing or exerting too much force may damage the decorative surface.

Many commercially available products contain substances that may damage or discolor the decorative surface. **Do not** use abrasive cleaners such as toilet bowl cleaners, hydrogen peroxide, oven cleaners, drain cleaners, metal cleaners and polishes, chlorine bleach, coffee pot cleaners, hard water stain removers, fruit and berry juice, tub and tile cleaners, or equivalent.

LG HI-MACS® Solid Surface Tops

Clean surfaces with a damp cloth or sponge with a mild soap.

Stains can easily be removed using a domestic all-purpose cleaner or for tough stains use a bleaching agent (do not leave in contact with the work surface for more than five minutes) and rinse with clean water.

Avoid using cleaning agents that contain acids, such as methyl chloride or acetone. Should one of these products accidentally come into contact with the material, as a precautionary measure, rinse the surface with soapy water to prevent any discoloring taking place.

For additional care/maintenance, visit: www.lghausys.com

Cambria® Quartz Work Surfaces

Clean surfaces with a damp cloth or sponge with a mild soap.

Do not use abrasive, strong alkaline, acid, free radicals, or oxidized cleaners (whether high, neutral or low pH). **Do not** use products such as bleach, oven cleaners, Comet®, Soft Scrub®, SOS®, products with pumice, batteries, paint removers, furniture strippers, or tarnish/silver cleaners. **Do not** use abrasive or harsh scrub pads. **Do not** apply sealers, penetrants or topical treatments, as such products will wear off and cause the gloss to appear dull or inconsistent.

For additional care/maintenance, visit: <u>www.cambriausa.com</u>