


PHOT-XIIs Model 505 LCD Sub-Controller Wall Mounting Template

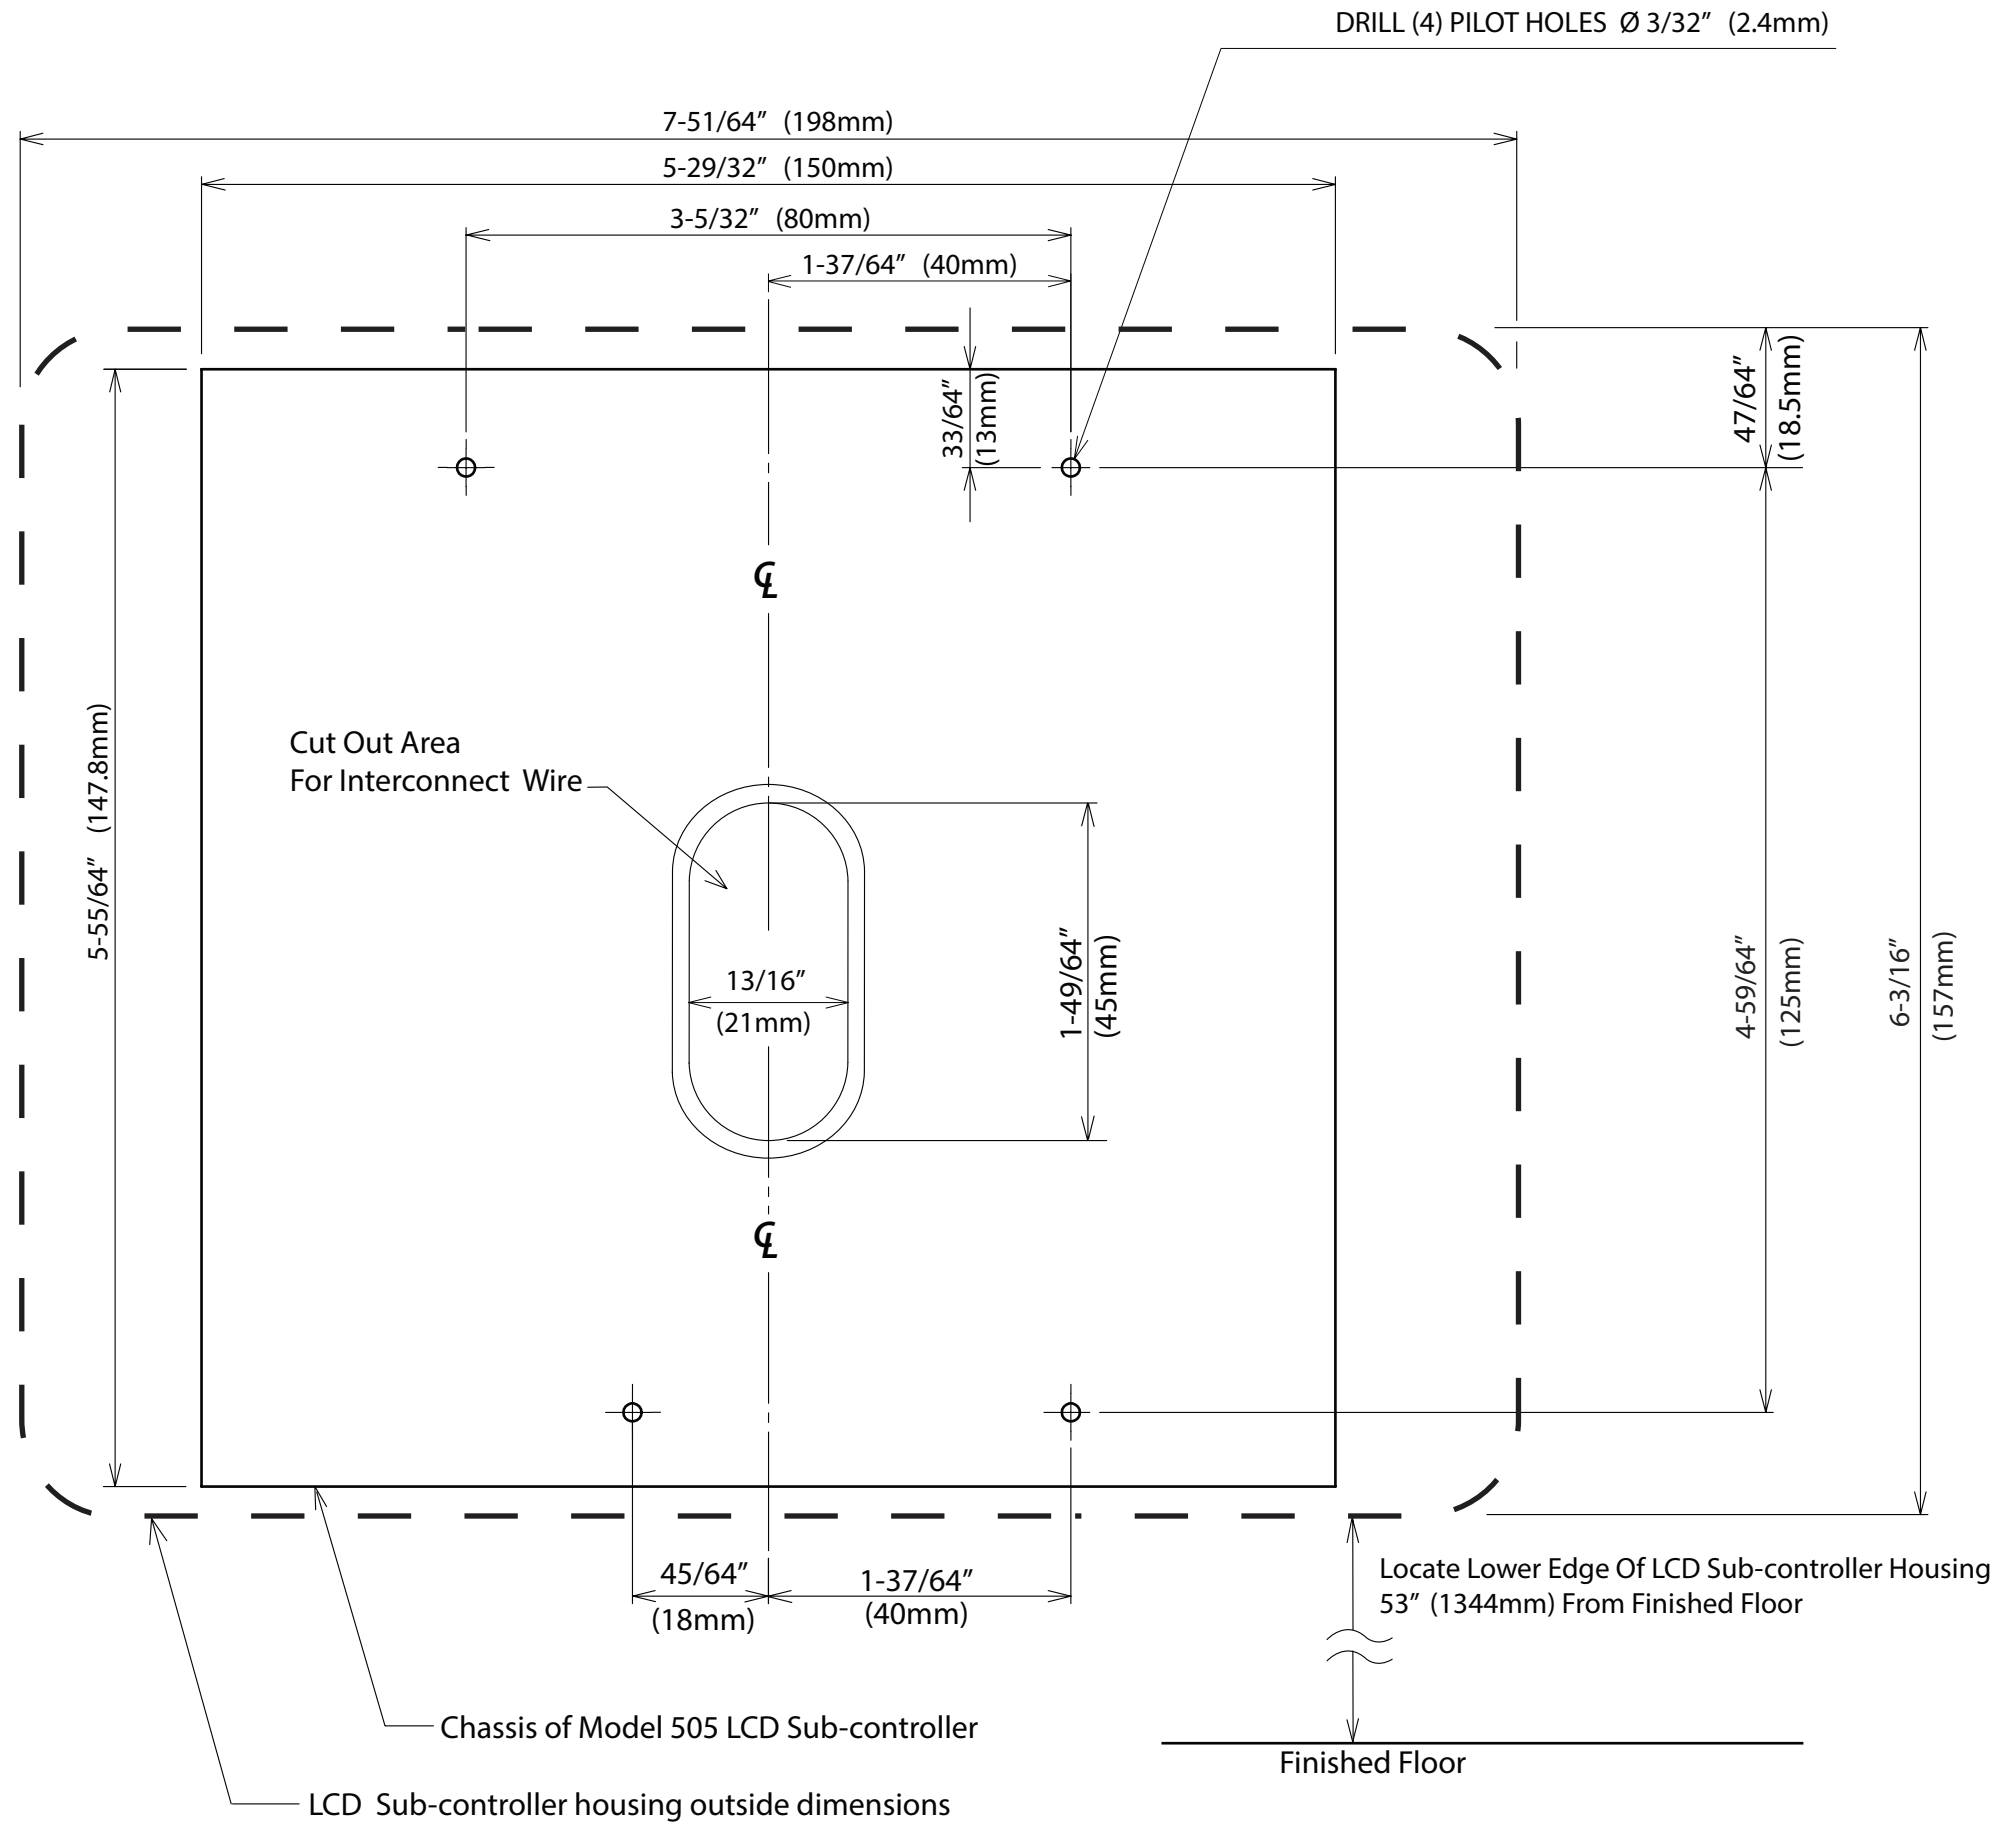

When mounting the model 505 LCD Sub-controller, the wall and mounting hardware must be sufficient to withstand a 10 lb. (45kg) shear load. The recommended interconnecting wire between the Main Controller and the Sub-Controller is 4-conductor, 20AWG, 300V cable. The maximum wire run distance is 33 feet (10m). The recommended height for the interconnecting wire hole is 56" (1420 mm) above the finished floor.